

Garden care products and forestry technology
for the perfect *solo* appearance



A close-up photograph of two hands, one from the left and one from the right, firmly grasping a thick, weathered wooden handle. The hands are positioned as if they are about to use a tool, possibly a shovel or a similar implement. The background is a blurred, light-colored fabric, likely a uniform. The lighting is natural, highlighting the texture of the skin and the wood.

The best comes together

solo by AL-KO merges innovative AL-KO lawn care technology with the proven garden and forestry technology of SOLO into a new, high-quality product line for private and professional users. With the goal of always finding the optimum, striving to inspire with new products and always fulfilling the wishes of our customers.

solo
by AL-KO



QUALITY FOR LIFE

solo by AL-KO offers garden care products and forestry technology engineered in Germany and made in Austria. Every device that we design and develop in Kötz in the Bavarian-Swabian region is manufactured in our new production facilities in Austria with the highest precision and using the latest technology. Professional level for professionals.



The person is the focus

solo by AL-KO focuses on the person, around whom everything revolves. That's why all products bear a round signet that represents the user in his work environment, thus highlighting the interplay between man and machine. This is also the origin of the SOLO brand name, which refers back to the fact that an individual person was able to work a vineyard alone for the first time thanks to innovative spray technology.



Garden care products and forestry technology for the perfect *solo* appearance

Lawn care

Lawn tractors / Ride-on mowers.....	12 – 21
Automatic lawnmowers.....	22 – 27
Petrol lawnmowers	
Aluminium deck.....	28 – 33
Steel plate deck.....	34 – 41
Plastic deck.....	42 – 44
Electric lawnmowers.....	45
Petrol brushcutters / trimmers.....	48 – 55
Brushcutter accessories.....	56 – 57

Garden care products

Scythe mowers.....	60 – 61
Combo tool.....	62 – 63
Blower vacs.....	64 – 65
Blade shredders.....	66 – 67
Hedge trimmers.....	68 – 69

Forestry technology

Petrol chain saws.....	72 – 79
Electric chain saws.....	80
Chain saw accessories.....	81
Operating supplies.....	82
Replacement chains / bars.....	82 – 83

Protective and work clothing.....

Technical data

Emissions values.....	86 – 87
-----------------------	---------



Lawn care
technology
for the perfect
solo appearance!



Powerful and beautiful lawn vehicles

Powerful and comfortable


The solo by AL-KO lawn tractor turns a functional garden tool into an emotional driving experience. You will feel the comfort as soon as you sit behind the wheel, you can rely on its safety as soon as you turn the key, and experience driving pleasure when you take it for a spin around your garden. With proven and powerful 4-stroke engines under the bonnet and cutting widths up to 125 centimetres, you get the right machine for any requirement and application.



Technology that sets new benchmarks

Clear overview

Thanks to the electronic display, the driver not only has constant access to operating days and hours, but also additional information such as battery charge status, fuel level or relevant safety information.

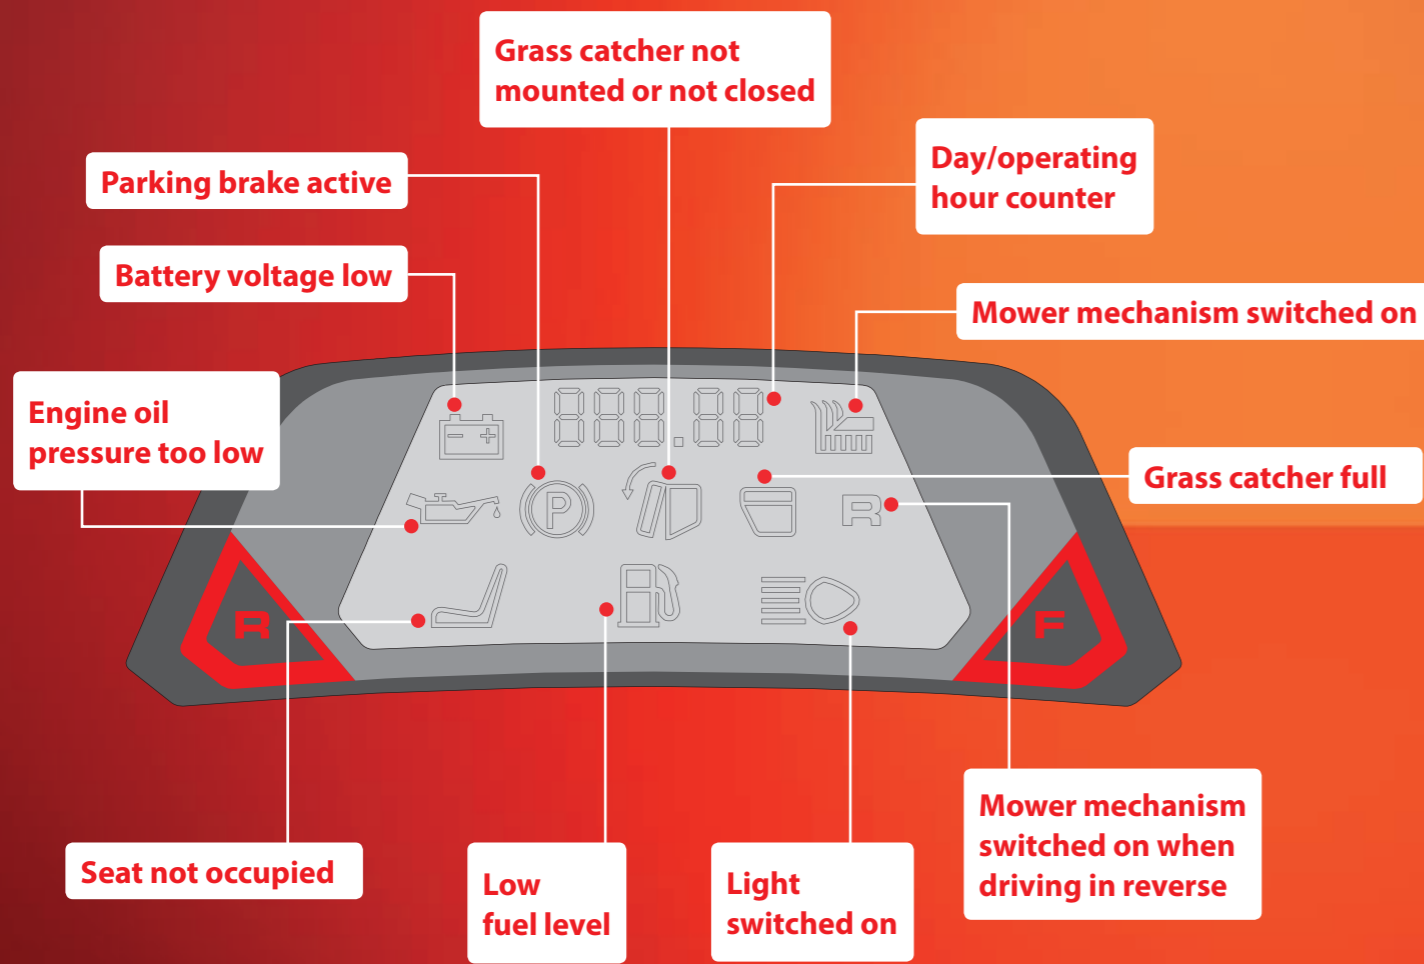

Powerful engines

We do not make any compromises when it comes to the force driving our tools. That's why we use high-quality 1- or 2-cylinder, 4-stroke engines from AL-KO and Briggs & Stratton, which are perfectly adapted to the requirements of the respective model. In addition, they are also fuel-efficient, low-vibration and low-maintenance.



Perfection in technology and comfort

T 15-95.5 HD-A



The entry-level model, with a 95-cm cutting width, an 8.5-kW AL-KO engine, foot, hydrostatic and standard mulching function doesn't just offer an attractive price/performance ratio – it also makes mowing child's play with its easy-to-access operating controls and electromagnetic blade brake clutch for easy activation/deactivation of the mower mechanism.

Art. 127 133

T 16-105.5 HD V2



This solid work model with cruise control and a 105-cm-wide mower deck is equipped with a powerful 10.5-kW, 2-cylinder engine from Briggs & Stratton and easily takes care of large and hilly areas. Should it run out of fuel, you can refuel the eight-litre tank quickly and easily via the external tank flap.

Art. 127 136

T 18-95.5 HD



The 10-kW Briggs & Stratton engine of the compact model not only provides strong propulsion, it is also robust and low-vibration. In combination with the 95-cm-wide mowing deck, it can easily handle medium to large lawns. The comfortable driver's seat also provides a nice overview of the area being mowed.

Art. 127 134

T 20-105.5 HDE V2



The premium model with electric grass catcher emptying, for everyone who loves convenience. This tractor with a complete set of equipment doesn't just look like a race car thanks to its 23"-wide tyres and low vehicle centre of gravity, it also easily handles the jolts while driving on uneven ground. Additional advantages of larger tyres: Excellent traction and fewer tracks on wet ground.

Art. 127 137

T 16-95.5 HD V2



With 2 cylinders under the bonnet and a robust cast front axle, the 10.5-kW power pack is optimal for ground with slopes and potholes. The integrated cruise control and electronic display makes work so much easier and even easier when equipped with electric grass catcher emptying, available as an upgrade.

Art. 127 135

T 23-125.5 HD V2



This top model from the tractor series is ideal for fast and easy handling of large areas with its extra-wide, synchronised, 125 cm mowing deck and extra-strong 13.5 kW, 2-cylinder engine. The robust and torsion-resistant C profile frame, as well as a stable cast front axle, also ensure long service and the best possible cushioning of impacts and jolts.

Art. 127 138

Small but good – ride-on class entry level

566 H



With its special design for smaller and angled properties, the Minirider easily moves around standing obstacles such as trees and benches. The fuel efficient Briggs & Stratton, 3.5 kW-engine provides the power needed. With its low overall width of 73 cm, this mower fits through most any garden gate and even narrow garden paths can be navigated quite easily.

Art. 126 608

555 H



This manoeuvrable ride-on mower isn't just characterised by its sleek shape and precision mower mechanism with a 72-cm cutting width; it also shows off in the comfort category with easy-to-use switches, a combined clutch/brake pedal and a central height adjustment feature. In addition, this device also wins points with its low 76-cm passage width.

Art. 126 606

T 13-92.5 HD



With a 92-cm mowing width, a foot hydrostatic with ergonomically arranged double pedals and a powerful 6.8 kW-engine from Briggs & Stratton, this entry-level model has everything you need to tackle medium to large lawns. When the box is full, the optimal pivot point and telescopic lever make mechanical emptying a snap.

Art. 127 155

Please note: Depending on availability, pure SOLO or AL-KO products may also be delivered which are identical in construction, but only differ in look from the products shown.


Winter accessories



Snow plough

For models T 15 – T 23
incl. mounting frame
Art. no. 119 600
EAN no. 400 371 835 2924

For model T 13
Art. no. 110 807
EAN no. 400 371 802 5460

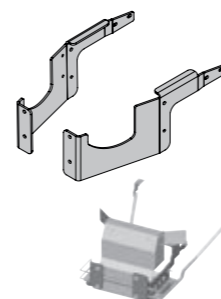

Mounting frame (separate)

For models T 15 – T 23
Art. no. 119 601
EAN no. 400 371 835 2931

For model T 13:
Art. no. 112 250
EAN no. 400 371 803 2956



Snow chains

18" (pair)
Art. no. 112 338
EAN no. 400 371 803 4240

20" (pair), art. no. 113 136
EAN no. 400 371 804 8636

23" (pair), art. no. 113 137
EAN no. 400 371 804 8643

Mulching kits



Mulching kit

For 92/95 cm: art. no. 118 885
EAN no. 400 371 834 5643

For 105 cm: art. no. 119 656
EAN no. 400 371 835 3440

For 125 cm: art. no. 119 605
EAN no. 400 371 835 2979

For model 555 H: art. no. 126 693
EAN no. 401 596 671 8018

Other accessories




Trailer TA 250*

Art. no. 110 804
EAN no. 400 371 802 5439



Lawn roller GW 100*

98 cm width
Art. no. 130 539
EAN no. 576 972 033 0617



*Required attachment: Tow hitch

For models T 15 – T 23
Art. no. 119 608
EAN no. 400 371 835 3006



For model T 13
Art. no. 110 813
EAN no. 400 371 802 5644



Deflector

For T 15 – T 23, art. no. 119 606
EAN no. 400 371 835 2986


For model T 13, art. no. 110 981
EAN no. 400 371 802 7792

For model 555 H, art. no. 126 690
EAN no. 401 596 659 8252



Charger CTEK XS 800

Art. no. 119 135
EAN no. 400 371 834 7968

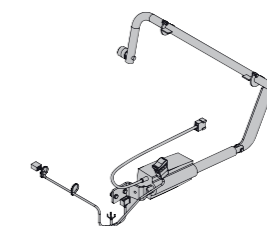

Electrical grass catcher emptying expansion package for T 15 – T 23

Art. no. 119 602
EAN no. 400 371 835 2948



Tractor cover

Wind- and water-tight
Art. 127 298
EAN 400 371 805 3821

Ride-on mowers and lawn tractors from small to large

	566 H	555 H	T 13-92.5 HD	T 15-95.5 HD-A	T 18-95.5 HD	T 16-95.5 HD V2	T 16-105.5 HD V2	T 20-105.5 HDEV2	T 23-125.5 HD V2
Cutting width	66 cm	72 cm	92 cm (2 blades)	95 cm (2 blades)	95 cm (2 blades)	95 cm (2 blades)	105 cm (2 blades)	105 cm (2 blades)	125 cm (2 blades, synchronised)
Blade brake clutch	Manual	Manual	Electro-magnetic	Electro-magnetic	Electro-magnetic	Electro-magnetic	Electro-magnetic	Electro-magnetic	Electro-magnetic
Engine	Briggs & Stratton 950 E Series	Briggs & Stratton Powerbuilt 3130	Briggs & Stratton Intek 3130 Series	AL-KO Pro 450	Briggs & Stratton Intek 4175 Series	Briggs & Stratton Intek 7160 Series	Briggs & Stratton Intek 7160 Series	Briggs & Stratton Intek 7200 Series V-Twin	Briggs & Stratton Intek 8230 Series
ccm / kW / rpm	223 / 3.5 / 2,450	344 / 6.8 / 2,800	344 / 6.8 / 2,900	452 / 8.5 / 2,900	500 / 10 / 2,900	656 / 10.5 / 2,900	656 / 10.5 / 2,900	656 / 13.1 / 2,900	724 / 13.5 / 2,900
Number of cylinders	1-cylinder	1-cylinder	1-cylinder	1-cylinder	1-cylinder	2-cylinder	2-cylinder	2-cylinder	2-cylinder
Transmission	Foot hydrostatic	Foot hydrostatic	Foot hydrostatic	Foot hydrostatic	Foot hydrostatic	Foot hydrostatic	Foot hydrostatic	Foot hydrostatic	Foot hydrostatic
Wheels f/r (inches)	13" / 15"	11" / 15"	13" / 18"	15" / 20"	15" / 20"	15" / 20"	16" / 20"	16" / 23"	16" / 23"
Grass catcher	150 l	170 l	220 l	310 l	310 l	310 l	310 l	310 l	310 l
Grass catcher emptying	Manual	Manual	Telescopic lever	Telescopic lever	Telescopic lever	Telescopic lever	Telescopic lever	Electrical	Telescopic lever
Mulching	Optional	Optional	Optional	•	•	•	•	•	•
Bumper	-	-	-	Optional	Optional	Optional	Optional	Optional	Optional
Headlights	-	•	-	•	•	•	•	•	•
Cast axle	-	-	-	-	-	•	-	•	•
Cruise control	-	-	-	-	-	•	•	•	•
Electronic display	-	-	-	-	-	-	-	•	•
Width/length dimensions	73 / 183 cm	76 / 186 cm	100 / 261 cm	100 / 251 cm	100 / 251 cm	100 / 251 cm	110 / 251 cm	110 / 251 cm	130 / 251 cm
Art. no.	126 608	126 606	127 155	127 133	127 134	127 135	127 136	127 137	127 138
EAN no.	401 596 656 0013	401 596 655 5019	400 371 805 1858	400 371 805 1360	400 371 805 1377	400 371 805 1384	400 371 805 1391	400 371 805 1407	400 371 805 1414

Loading ramps



Curved loading ramp

Load (2 units): 400 kg
Length: 1.5 m | 2.0 m
Width: 214 mm | 225 mm
Art. no. 130 569 | 130 585

Load (2 units): 1,000 kg
Length: 2.0 m | 2.5 m
Width: 258 mm | 260 mm
Art. no. 130 590 | 130 570



Straight loading ramp

Load (2 units): 400 kg
Length: 1.5 m | 2.0 m
Width: 214 mm | 225 mm
Art. no. 130 568 | 130 586



Fully automatic lawn care at the push of a button

Perfect in all details


Robolinho® automatic lawnmowers not only mow lawns up to 2000 m² completely automatically and reliably – they also offer a highly dynamic design and quiet operation. Developed by our skilled engineers from Germany and precisely manufactured in our production facilities in Austria, these devices also gain points with impressive interior dimensions. The compact design, powerful lithium-ion battery, small turning circle and powerful drive are just a few of the features that ensure trouble-free operation.



Easy to install, you'll be up and running in no time

Your path to fully automatic lawn care

The Robolinho® automatic lawnmower is ready for use in just a few steps: Set up and anchor the base station, lay the supplied boundary cable around the mowing area, secure it with lawn pegs, program the operating times, and that's it. It's even easier when you leave on-site installation to your Robolinho® dealer. He would be happy to provide you with any help you need.

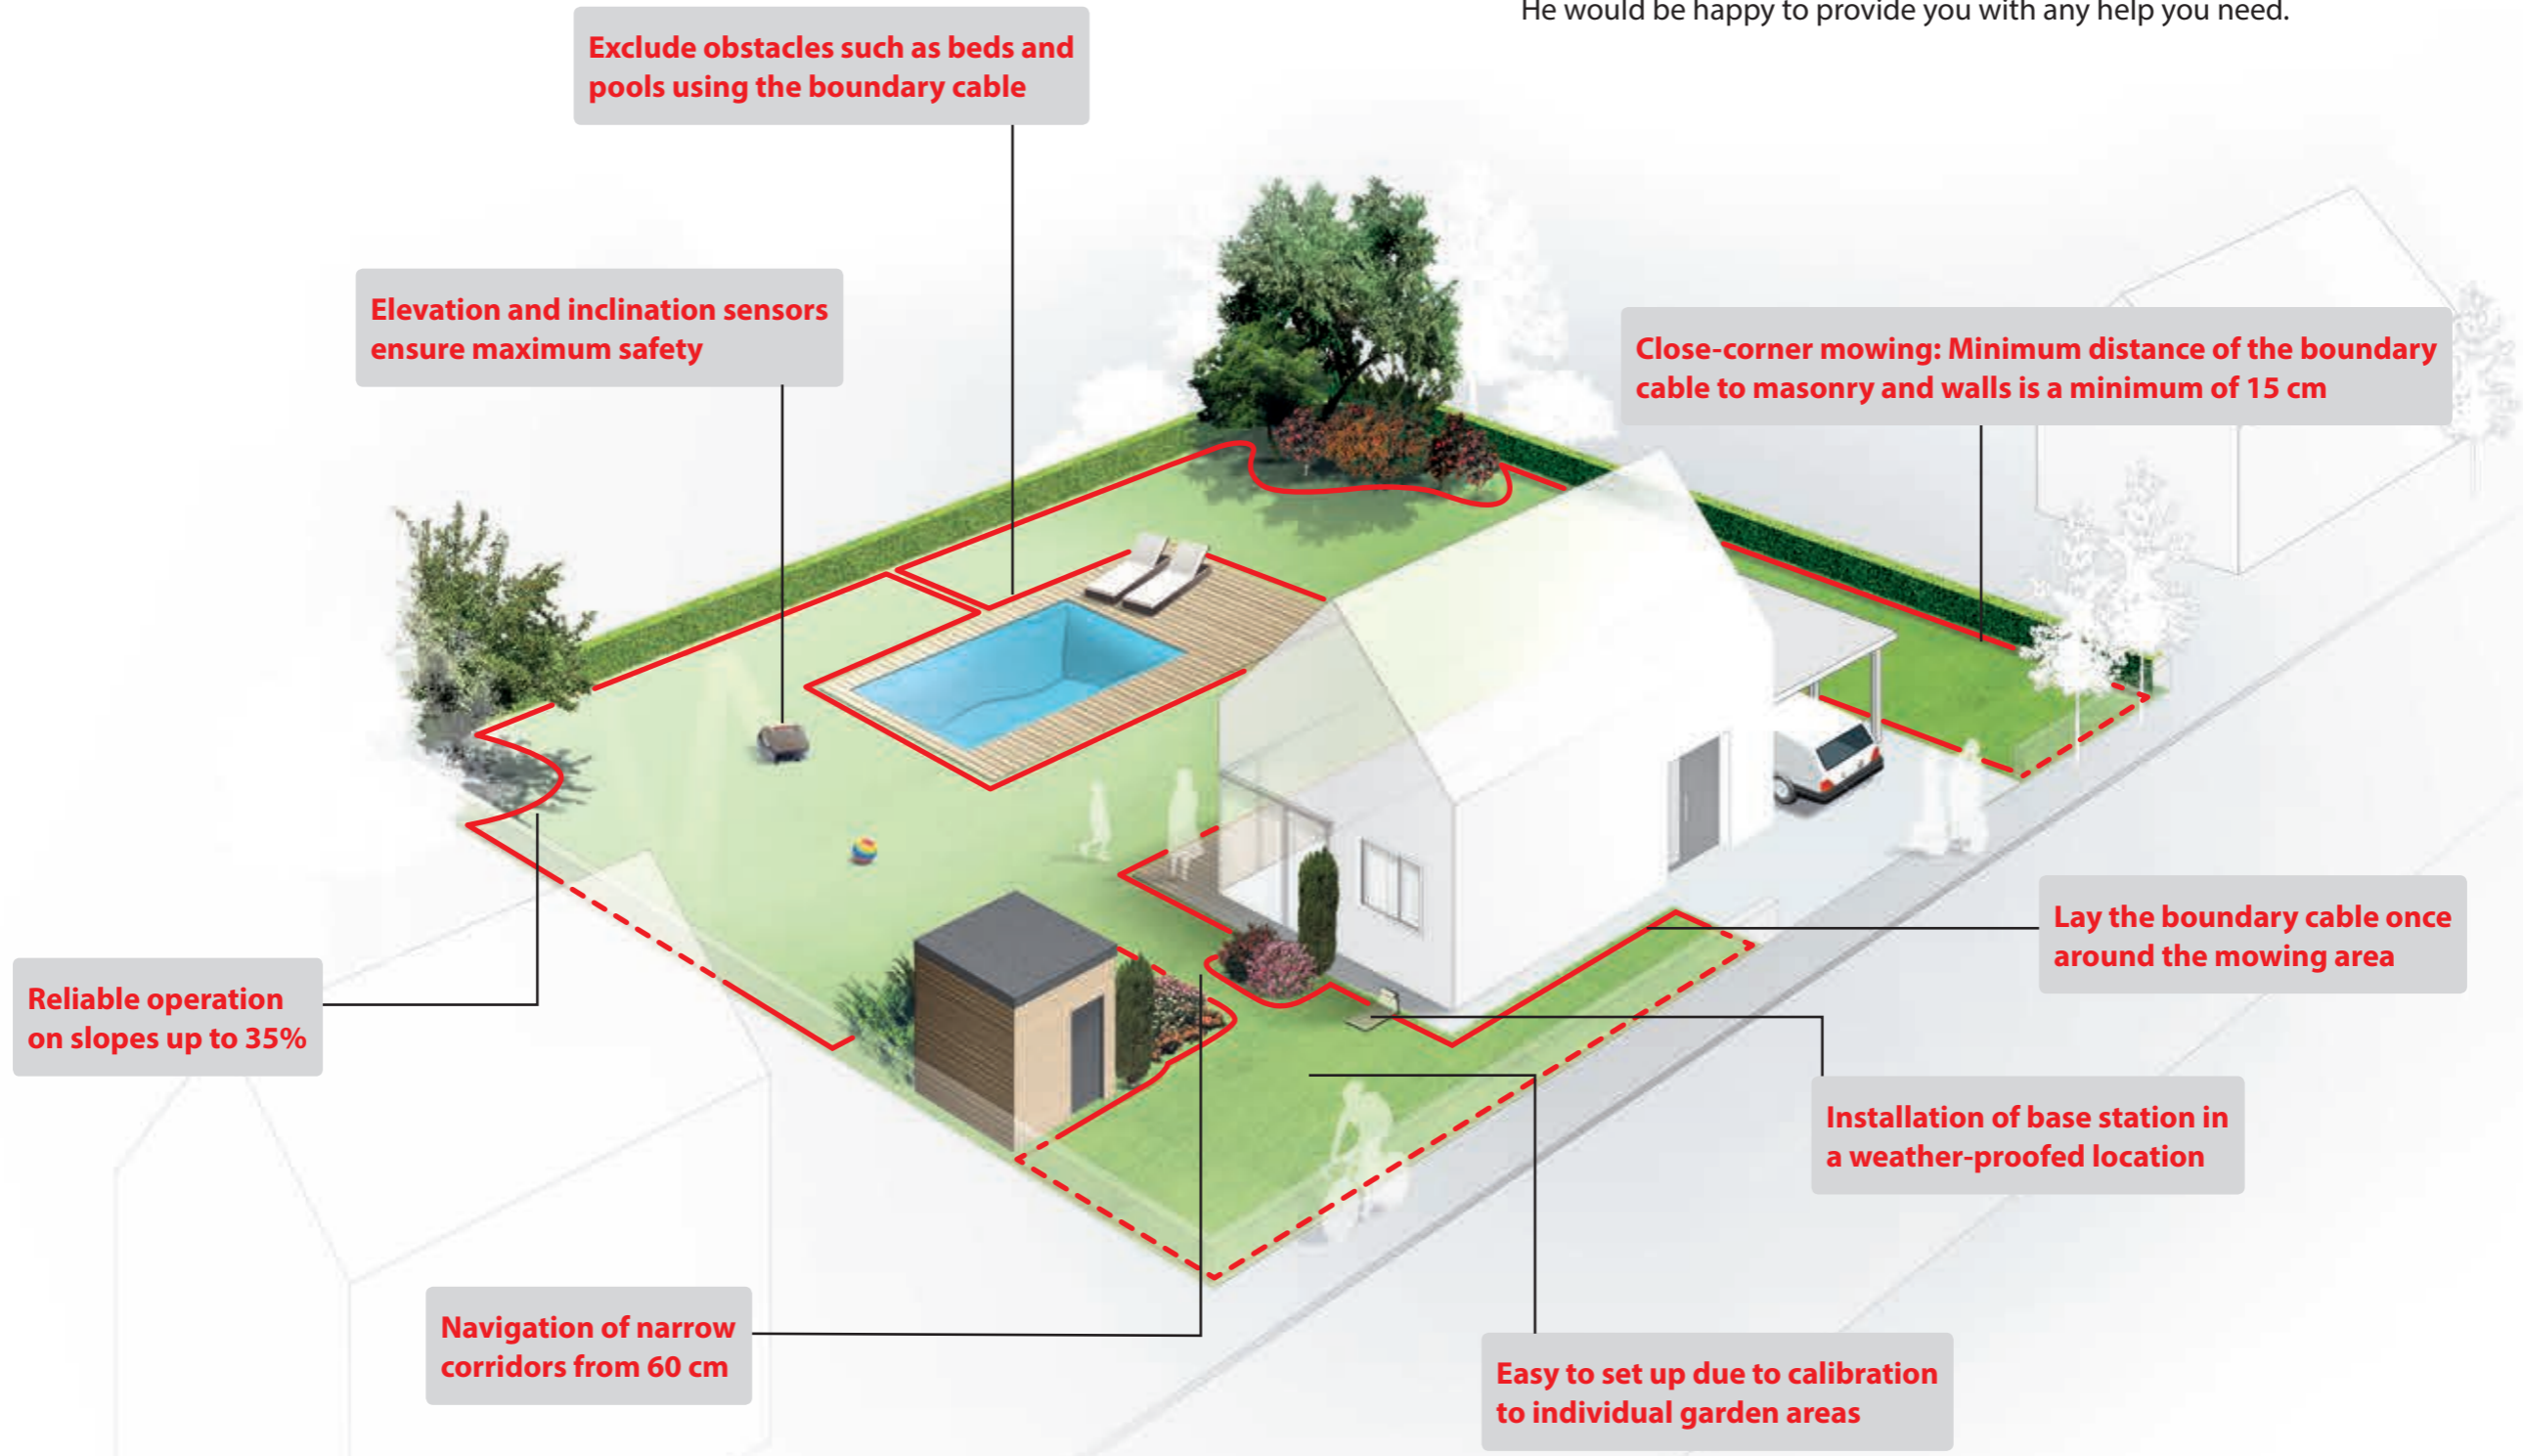

The right fit for every size

Robolinho® 1000



The Robolinho® 1000 entry-level model will not only turn your neighbours green with envy, but will also painstakingly care for lawns up to 700 m². The unique double-blade technology always ensures natural fertiliser because the clippings are finely chopped up directly in the mower deck, and then blown back into the lawn.

Art. 119 689

Robolinho® 3000



The Robolinho® 3000 mows lawn areas up to 1200 m² safely and fully automatically. Along with the double-blade technology, it also comes standard with a rain sensor and the option of selecting various entry points. Thus even difficult-to-access areas of the garden are mowed reliably. The automatic lawnmower can also be operated with a second base station on a separate lawn.

Art. 119 356

Robolinho® 4000



The biggest member of the Robolinho® family handles lawns up to 2000 m² and ensures especially efficient and environmentally friendly operation. It is operated via a clearly arranged LCD display, the cutting height adjustment is set electronically via the push of a button. A powerful drive, good traction of the drive wheels and high ground clearance also ensures fully automatic, daily operation.

Art. 119 511

	Robolinho® 1000	Robolinho® 3000	Robolinho® 4000
Work area*	Max. 700 m ²	Max. 1,200 m ²	Max. 2,000 m ²
Cutting width	28 cm	30 cm	32 cm
Mowing time / charging time (up to)	45 / 90 min	120 / 120 min	120 / 180 min
Dimensions (LxWxH)	600 x 490 x 245 mm	600 x 490 x 245 mm	625 x 540 x 295 mm
Cutting height adjustment	30-60 mm, manual	30-60 mm, manual	30-60 mm, electric
Li-ion battery	2.25 Ah / 18 V	2.9 Ah / 25.2 V	4.4 Ah / 25.2 V
Volume when mowing	Max. 65 dB (A)	Max. 65 dB (A)	Max. 65 dB (A)
Double-blade technology	•	•	•
Rain sensor	-	•	•
Free choice of entry points	-	•	•
Installation of 2nd base station	-	•	•
Operation on a 2nd lawn	-	Optionally with 2nd base station	Optionally with 2nd base station
Loop wire in scope of delivery	100 m	150 m	200 m
Art. no.	119 689	119 356	119 511
EAN no.	400 371 835 3778	400 371 835 0371	400 371 835 2016

Accessories

Replacement blade (3 x 2 unit) Art. no. / EAN no.	119 546 / 400 371 835 2368	119 546 / 400 371 835 2368	119 546 / 400 371 835 2368
Blade disc Art. no. / EAN no.	119 543 / 400 371 835 2337	119 544 / 400 371 835 2344	119 545 / 400 371 835 2351
Lawn peg (90 units) Art. no. / EAN no.	119 461 / 400 371 835 1477	119 461 / 400 371 835 1477	119 461 / 400 371 835 1477
Loop wire (150 m) Art. no. / EAN no.	119 462 / 400 371 835 1484	119 462 / 400 371 835 1484	119 462 / 400 371 835 1484

Robust power packs with a complete set of equipment

By professionals for professionals

The aluminium cast deck of our petrol lawnmowers combines not only the highest stability with durability and optimal aerodynamics, it is also torsion-resistant, rust-proof, acoustically insulating as well as extremely resistant to impacts and undulations. With cutting widths up to 53 centimetres and comfortable full equipment options, it satisfies all requirements of professional users.



Perfection in its most beautiful form

553 K



This professional mower with a 53-cm cutting width and a Honda engine can handle any and all mowing situations and lawns. Thanks to its robust aluminium cast deck with impact protection, steel insert and reinforced handlebar support, sturdy gear with a cardan drive as well as ball-bearing, over-dimensioned aluminium wheels, this petrol lawnmower is totally unshakable. The separate blade brake clutch as well as the robust individual wheel adjustment round off the equipment list of this professional lawnmower.

Art. 127 148

4855 SP Alu



The compact aluminium lawnmower with a 48-cm working width and 2.5-kW Briggs & Stratton engine offers many benefits for the professional series: Wheel drive, multi-height adjustable handlebar with an aluminium deck connection, extra-large fabric grass catcher, central cutting height adjustment, ball-bearing XXL tyres, integrated front carry handle and double-sided deck protection.

Art. 127 125

5375 VS Alu



This robust, all-rounder mower with a full equipment set offers excellent mowing and catching with its 52-cm cutting width and 3.1-kW of power, which is supported by an extra-high and aerodynamic aluminium cast deck. The stable steel rims with a high-grip tread offer the best traction on any type of terrain and ground, while the variable-speed wheel drive offers maximum comfort.

Art. 127 126

5375 VSC Alu



Like the 5375 VS Alu, this aluminium mower is perfect for all applications with its 52-cm cutting width and powerful Briggs & Stratton engine. A separate blade brake clutch is also integrated as an extra on this device, which makes it possible to empty the fabric grass catcher with the engine running. This makes mowing work with this device even faster and more effective.

Art. 127 127



The extremely robust lawn mowers

	4855 SP Alu	5375 VS Alu	5375 VSC Alu	553 K
Cutting width	48 cm	52 cm	52 cm	53 cm
Mulching/Side discharge	●/●	●/●	●/●	●/-
Cutting height/ cutting height adjustment	30 – 85 mm / central, 6-stage	30 – 85 mm / central, 6-stage	30 – 85 mm / central, 6-stage	26 – 82 mm / individual wheel, 7-stage
Engine ccm / kW / rpm	B&S Series 675 EX 190 / 2.5 / 2,800	B&S series 850 E 190 / 3.1 / 2,800	B&S series 850 E 190 / 3.1 / 2,800	Honda GXV 160 163 / 2.7 / 2,800
Wheel drive	1-speed	Variable	Variable	Variable (cardan)
Mower deck	Aluminium	Aluminium	Aluminium	Aluminium
Grass catcher capacity	75 l	75 l	75 l	75 l
Cockpit	•	•	•	•
Handlebar height adjustment	•	•	•	•
Blade brake clutch	-	-	•	•
Wheels Ø front/rear	200 / 280 mm	200 / 280 mm (Steel plate)	200 / 280 mm (Steel plate)	244 / 244 mm (Aluminium)
Weight (gross/net)	52.9 / 47.6 kg	57 / 51.7 kg	61.3 / 56 kg	65.6 / 60.4 kg
Art. no.	127 125	127 126	127 127	127 148
EAN no.	400 371 805 1285	400 371 805 1292	400 371 805 1308	400 371 805 1681
Replacement blade Art. no. / EAN no.	119 260 / 400 371 834 9351	119 167 / 400 371 834 8286	119 167 / 400 371 834 8286	SL 7691014188 / 401 596 606 2791



Along with mowing and catching, professional petrol lawn mowers from solo by AL-KO also offer three additional functions thanks to the mulching insert (left), deflector (middle) and side discharge (right) – also ideal for use in meadows and orchards.

The integrated upstanding function (right) allows you to store your professional lawn mowers upright and this also makes cleaning and blade changes a snap.

Oils



4-stroke lawn mower oil SAE 30
0.6 l, art. 112888
EAN 400 371 804 3952



4-stroke lawn mower oil SAE 30
1.0 l, art. 112 887
EAN 400 371 804 3945



4-stroke lawn mower oil 10W40
1.0 l, art. 112 901
EAN 400 371 804 4089

Accessories



Engine service kit
for easy oil change
Art. 106 118
EAN 400 371 800 5172



Lawn mower cover
Wind- and water-tight
Art. 127 297
EAN 400 371 805 3814



Mulching kit for 553 K
Art. 126 680
EAN 401 596 659 4285

Additional technical information can be found on page 86/87 or at www.solobyalko.com.

Please note: Depending on availability, pure SOLO or AL-KO products may also be delivered which are identical in construction, but only differ in look from the products shown.



Multi-talented for pure mowing pleasure

Mowing without the struggle

The classic solo by AL-KO lawnmowers with cutting widths from 42 to 51 centimetres impress with their robust deck made from premium steel and wide range of powerful engines. The range also includes model specific comfort features. For example, there are various cockpit and grass catcher variants available as well as various wheel-drive versions. This also includes models with and without side discharge as well as a mulching mower.



*not available for all models

Compact and powerful petrol lawnmowers

4255 P-A



Small but good – this sums up this manoeuvrable petrol lawnmower with a 42-cm cutting width and a 2.1-kW AL-KO engine with OHV technology, which achieves outstanding efficiency with its overhead valves. As if the extra power and improved fuel efficiency weren't enough, it also comes with a quick start system for fast and easy starting.

Art. 127 118

4755 VS



The comfort model with variable-speed wheel drive, multi-height adjustable handlebar and integrated front carry handle are just the beginning. This petrol lawnmower also comes with a powerful 2.7-kW Briggs & Stratton engine, the exclusive cockpit with a rubberised handle area and easy-to-use controls. The total package is rounded off with the extra-large fabric grass catcher with fill level display.

Art. 127 122

4735 SP-A



This light and manoeuvrable petrol lawnmower ensures fast and energy-saving mowing of medium-sized lawns thanks to its 46-cm-wide mowing deck and wheel drive. The aerodynamic shape of the deck and grass catcher guarantees excellent mowing and catching, and equipment features such as central cutting height adjustment and ball-bearing XXL wheels ensure optimal operating comfort.

Art. 127 116

4755 VSI



A next-generation electric start is the heart of this petrol lawnmower. It can be started with just the turn of a key thanks to modern lithium technology. Contrary to other electric start models, the energy required for this comes from a regular battery that can be charged, inserted and stored away in no time. This provides improved flexibility and ease of use for this mower.

Art. 127 120

4605 SP Bio



This mower ensures a healthy lawn. The secret: During mulch-mowing, the cut blades of grass are thrown upwards within the mower deck, finely chopped by the special blade and blown back into the turf as a natural fertiliser – this returns natural nutrients to the lawn and protects it against drying out. If required, the mower can also be converted for side discharge tool-free.

Art. 127 128



Additional technical information can be found on page 86/87 or at www.solobyalko.com.

Please note: Depending on availability, pure SOLO or AL-KO products may also be delivered which are identical in construction, but only differ in look from the products shown.

Mowers that are not afraid to tackle the big lawns

5235 SP-A



The entry-level model in the 51-cm-mower-deck class has everything it needs to ensure easy-going mowing pleasure, such as wheel drive, central cutting height adjustment and XXL easy-running wheels. This petrol lawnmower uses a powerful 2.3-kW AL-KO engine with OHV technology, which delivers more power with lower fuel consumption due to its overhead valves.

Art. 127 117

5275 VS



Ball-bearing XXL wheels made from steel plate with a high-grip tread, the powerful 3.1-kW Briggs & Stratton IC engine and the variable-speed wheel drive make this petrol lawnmower with a 51-cm cutting width the go-to tool for any terrain. Thanks to the multi-height adjustment feature, the ergonomic handlebar with the exclusive cockpit can be optimised for the respective user and the integrated front carry handle makes lifting and transport easier.

Art. 127 124

5255 VS



Mowing without the struggle – that's the motto of this petrol lawnmower which makes work child's play thanks to the ergonomically shaped handlebar, variable-speed wheel drive, central cutting height adjustment and ball-bearing XXL wheels. The side-protected premium steel deck and the aluminium handlebar connections ensure durability and stability.

Art. 127 121

5255 VS-H



Comfortable power pack with the Honda-Power (2.8 kW) is one way to describe this petrol lawnmower. Because with mowing, catching, mulching and side discharge, it offers all functions for maximum comfort with an exclusive cockpit, multi-height adjustable handlebar, large grass catcher, variable-speed wheel drive and an integrated front carry handle.

Art. 127 123



Petrol lawn mowers with a steel plate deck

	4255 P-A	4735 SP-A	4755 VS	4755 VSI	4605 SP Bio	5235 SP-A	5255 VS	5275 VS	5255 VS-H
Cutting width	42 cm	46 cm	46 cm	46 cm	46 cm	51 cm	51 cm	51 cm	51 cm
Mulching/Side discharge	●/-	●/-	●/●	●/●	●/●	●/-	●/●	●/●	●/●
Cutting height/ cutting height adjustment	30 – 70 mm / central	30 – 80 mm / central	30 – 80 mm / central	30 – 80 mm / central	30 – 85 mm / wheel axle	30 – 80 mm / central	30 – 80 mm / central	30 – 80 mm / central	30 – 80 mm / central
Engine ccm / kW / rpm	AL-KO PRO 140 QSS 140 / 2.1 / 2,850	AL-KO PRO 140 QSS 140 / 2.1 / 2,850	B&S Series 750 EX 161 / 2.7 / 2,800	B&S Series 775 IS 161 / 2.7 / 2,800	B&S series 625 E 190 / 2.4 / 2,800	AL-KO PRO 160 QSS 159 / 2.3 / 2,850	B&S Series 625 EX 190 / 2.5 / 2,800	B&S Series 850 E/IC 190 / 3.1 / 2,800	Honda GCV 160 160 / 2.8 / 2,900
Wheel drive	-	1-speed	Variable	Variable	1-speed (front wheel)	1-speed	Variable	Variable	Variable
Mower deck	Steel plate	Steel plate	Steel plate	Steel plate	Steel plate	Steel plate	Steel plate	Steel plate	Steel plate
Grass catcher capacity	70 l	70 l	70 l	70 l	-	70 l	70 l	70 l	70 l
Cockpit	-	-	●	●	●	-	●	●	●
Handlebar height adjustment	-	-	●	-	●	-	-	●	●
Electric start	-	-	-	●	-	-	-	-	-
Wheels Ø front/rear	180 / 205 mm	200 / 280 mm	200 / 280 mm	200 / 280 mm	220 / 205 mm	200 / 280 mm	200 / 280 mm	200 / 280 mm	200 / 280 mm
Weight (gross/net)	36.7 / 31.8 kg	40.4 / 35.8 kg	46.1 / 41.4 kg	44.2 / 39.5 kg	37.8 / 33.4 kg	42.9 / 38 kg	44.5 / 39.8 kg	47.9 / 43.2 kg	46.2 / 41.5 kg
Art. no.	127 118	127 116	127 122	127 120	127 128	127 117	127 121	127 124	127 123
EAN no.	400 371 805 1216	400 371 805 1193	400 371 805 1254	400 371 805 1230	400 371 805 1315	400 371 805 1209	400 371 805 1247	400 371 805 1278	400 371 805 1261
Replacement blade Art. no. / EAN no.	113 138 / 400 371 804 8650	113 057 / 400 371 804 7271	113 057 / 400 371 804 7271v	113 057 / 400 371 804 7271	119 224 / 400 371 834 8859	113 058 / 400 371 804 7288	113 058 / 400 371 804 7288	113 058 / 400 371 804 7288	113 058 / 400 371 804 7288

Additional technical information can be found on page 86/87 or at www.solobyalko.com.

Please note: Depending on availability, pure SOLO or AL-KO products may also be delivered which are identical in construction, but only differ in look from the products shown.



Effortless mowing

Compact plastic mowers

Easy to operate and manoeuvre, featuring excellent mowing and catching properties as well as a nearly indestructible plastic mower deck – those are the attributes of these petrol lawnmowers. The integrated Aeromatic feature ensures that the grass catcher is filled completely even when the grass is wet.



*not available for all models

582



A robust, ultra-light mower with high stability and high manoeuvrability – ideal for lawns up to 600 m² as well as users who place value on a successful mixture of functionality, quality and comfort. And if you don't want to use the spacious fabric grass catcher, then this mower can also be transformed into a mulching mower in no time using the separately available mulching kit.

Art. 127 129

546



A light yet stable plastic mower deck, a powerful Briggs & Stratton engine as well as the integrated Aeromatic feature for optimal catcher filling make this petrol lawnmower the perfect lawn care tool. When it is no longer required, it is easy to store away thanks to the practical quick fasteners on the folding handlebar. A deflector for the side discharge function is available as an option.

Art. 127 130

546 R



Wheel drive and the optional electric start (546 RS) turn this plastic mower into a fully-equipped comfort mower with a powerful engine, central cutting height adjustment, Aeromatic feature, multi-height adjustment, XL easy-running wheels, quick fasteners, grass catcher with dust protection and optional mulching/side discharge function.

Art. 127 131

546 RS

With easy electric start

Art. 127 132

Additional technical information can be found on page 86/87 or at www.solobyalko.com.

Please note: Depending on availability, pure SOLO or AL-KO products may also be delivered which are identical in construction, but only differ in look from the products shown.

Petrol lawnmowers with a plastic deck

	582	546	546 R	546 RS
Cutting width	40 cm	46 cm	46 cm	46 cm
Mulching/Side discharge	Optional / –	Optional / Optional	Optional / Optional	Optional / Optional
Cutting height/cutting height adjustment	25 – 70 mm / Central, variable	30 – 75 mm / Central, variable	30 – 75 mm / Central, variable	30 – 75 mm / Central, variable
Engine ccm / kW / rpm	B&S Series 575 EX 140 / 2.2 / 2,900	B&S series 650 E 190 / 2.4 / 2,800	B&S series 650 E 190 / 2.4 / 2,800	B&S series 650 E 190 / 2.4 / 2,800
Wheel drive	–	–	•	•
Mower deck	Plastic	Plastic	Plastic	Plastic
Grass catcher capacity	40 l	50 l	50 l	50 l
Handlebar concept	–	–	–	–
Handlebar height adjustment	•	•	•	•
Electric start	–	–	–	•
Aeromatic	•	•	•	•
Wheels Ø front/rear	150 / 200 mm	180 / 200 mm	180 / 200	180 / 200 mm
Weight (gross/net)	27.6 / 23.5 kg	34 / 30 kg	37 / 34 kg	40 / 34 kg
Art. no.	127 129	127 130	127 131	127 132
EAN no.	400 371 805 1322	400 371 805 1339	400 371 805 1346	400 371 805 1353

Replacement blade Art. no. / EAN no.	SL 50 43 328 / 401 596 658 5344	SL 50 43 361 / 401 596 698 7287	SL 50 43 361 / 401 596 698 7287	SL 50 43 361 / 401 596 698 7287
---	---------------------------------	---------------------------------	---------------------------------	---------------------------------

Accessories



Mulching kit 582
Art. 126 682
EAN 401 596 659 8245



Deflector 546 (side discharge)
Art. 126 148
EAN 401 596 659 8009
€ 75



Mulching kit 546
Art. 126 146
EAN 401 596 659 8306



The integrated Aeromatic feature increases the air circulation in the deck and thus supports complete filling of the grass catcher – even for wet and dense grass.

Electric lawnmowers with a steel plate deck

4705 E



This electric lawnmower is powerful and quiet with a steel plate deck and an ergonomically shaped handlebar with a safety switch, ensuring comfortable and fatigue-free work. The integrated front carry handle is not only ideal for lifting the mower over obstacles in the garden – it also facilitates transport or storage of the machine.


Art. 127 154

Cutting width	46 cm
Lawns to	900 m ²
Mulching/Side discharge	• / –
Cutting height/cutting height adjustment	25 – 70 mm / central, 7-stage
Engine	Electric, 1,600 W
Wheel drive	–
Mower deck	Steel plate
Grass catcher capacity	65 l
Wheels Ø front/rear	200 / 280 mm
Weight	29.5 kg
Art. no.	127 154
EAN no.	400 371 805 1803
Replacement blade Art. no. / EAN no.	113 057 / 400 371 804 7271

Additional technical information can be found on page 86/87 or at www.solobyalko.com.

Please note: Depending on availability, pure SOLO or AL-KO products may also be delivered which are identical in construction, but only differ in look from the products shown.



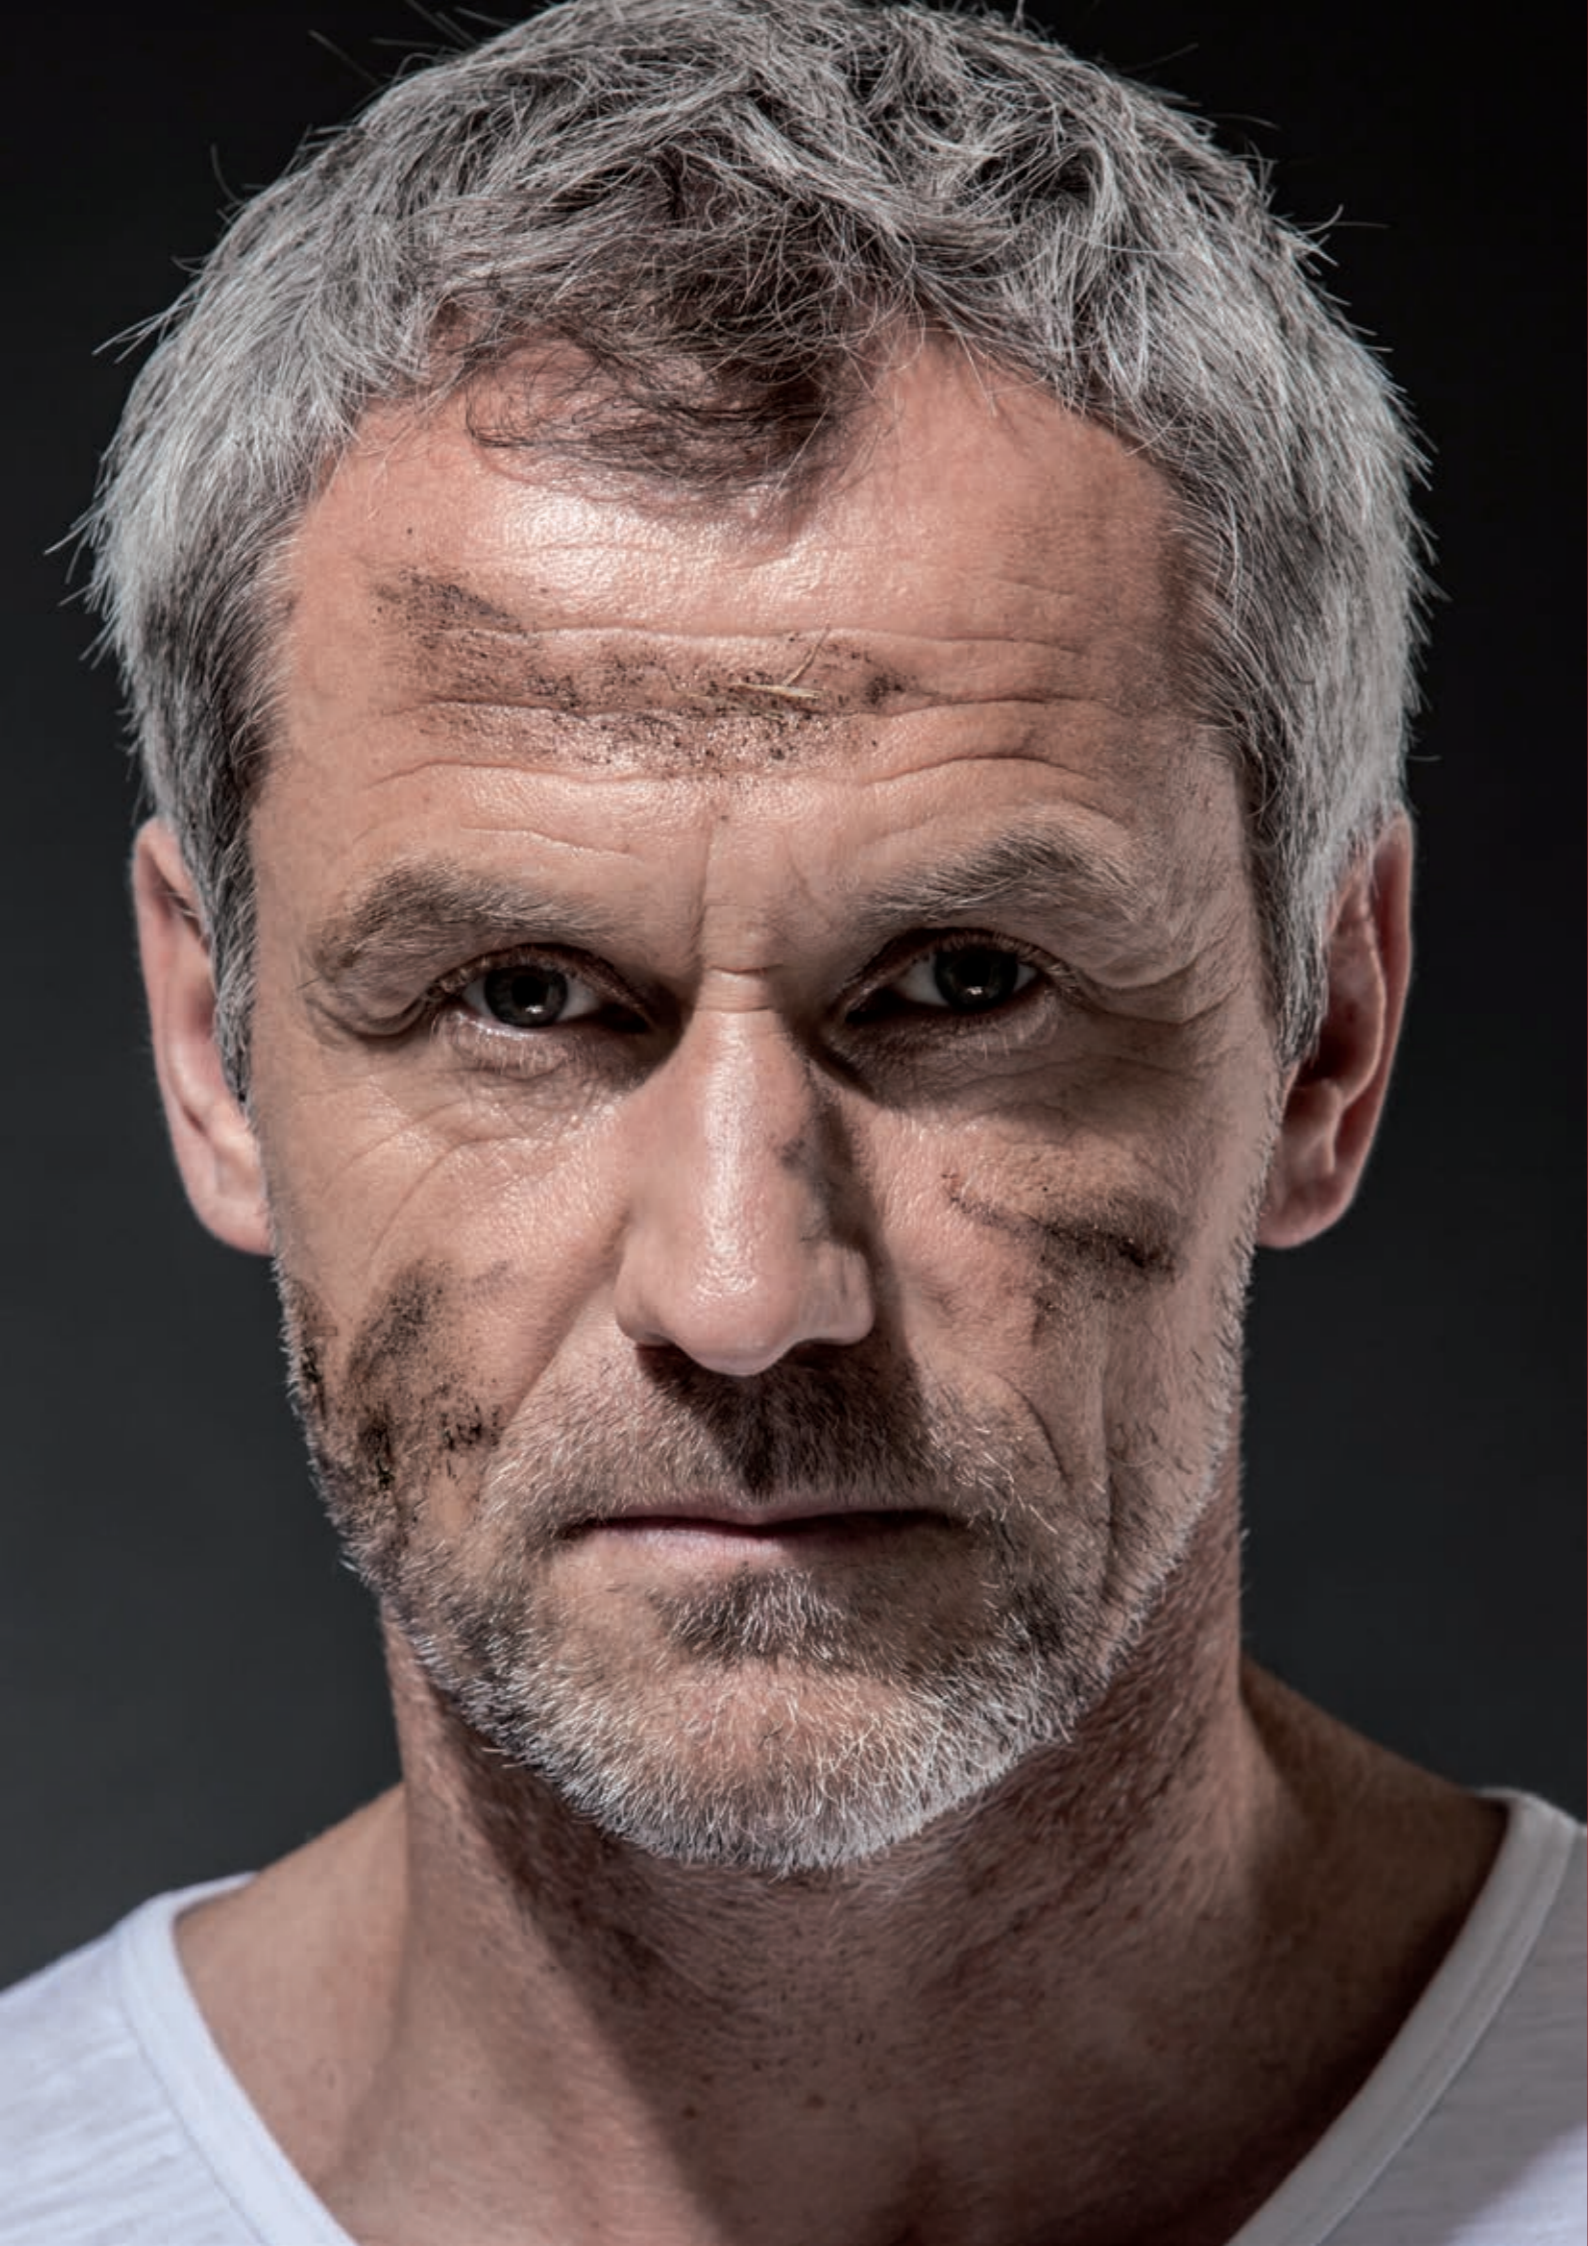

Brushcutters for the perfect *solo* appearance



Worthy of the name

Trimmers and brushcutters

Whether clearing out your home garden or for professional landscape management – you have numerous application options with the brushcutters and trimmers from solo by AL-KO along with suitable cutting tool attachments and the right engine power. The user also has things under control with the various handle and belt versions available.



*not available for all models

For a wide variety of light jobs

116



This light and easy-to-handle, entry-level cutter with a practical loop grip is ideal for mowing and clearing out high grass and light thickets with a displacement of 25.4 cm³ and 0.75 kW. The easy-start system and centrifugal clutch ensure smooth operation, while the ergonomic handle and optimal device balance ensure a natural working posture.

Art. 127 150

118 L



With 0.9-kW and 32.6 cm³, this brushcutter is the right choice for clearing wild-growing grasses and undergrowth. Thanks to the easy-start system with primer, the powerful, 2-stroke engine springs easily to life. The centrifugal clutch as well as the right blade and line head attachments ensure reliable and clean work results during operation.

Art. 127 151

118 B



With the 0.9-kW brushcutter, work such as mowing lawn edges or clearing undesired undergrowth and bushes is quick and easy. The controls integrated into the adjustable and ergonomically-shaped bike handle make light work of everything just like the belt suspension rail including shoulder strap.

Art. 127 152

107 L-S



Mobility and multiple functions with just one device – that's what this brushcutter has to offer with its easy quick coupling feature that ensures quick system tool changes and quick separation of individual components for easy transport and storage. This cutter is powered by a 32.6-cm³, 2-stroke engine whose magnesium crankcase promises a long service life.

Art. 127 231

System tools 107 L-S



- a) Line head spool with gear**
Shaft length 750 mm
(part of the 107 L-S scope of delivery)
- b) Metal blade with gear**
Shaft length 750 mm
Art. 126555, EAN no. 401 596 669 5173
- c) Soil cultivator**
Shaft length 750 mm
Art. 126065, EAN no. 401 596 669 1502

- d) Pole pruner**
Shaft length 750 mm, cutting length 250 mm
Art. 126063, EAN no. 401 596 669 2264
- e) Blower**
Shaft length 750 mm
Art. 126473, EAN no. 401 596 669 7153
- f) Shaft tube extension 800 mm**
Art. 126066, EAN no. 401 596 669 6088
- g) Shaft tube extension 210 mm**
for attaching a hedge trimmer
Art. 126067, EAN no. 401 596 669 2653
- h) Hedge trimmer**
Shaft length 750 mm
Cutting length 536 mm
Art. 126061, EAN no. 401 596 669 2288

Additional technical information can be found on page 86/87 or at www.solobyalko.com.
Please note: Depending on availability, pure SOLO or AL-KO products may also be delivered which are identical in construction, but only differ in look from the products shown.

Work where lawnmowers reach their limits

120



With a 1.1 kW-engine and a displacement of 42.7 cm³, this brushcutter doesn't shy away from strong wild growth and bushes. A belt suspension rail, double shoulder strap and easy-to-adjust bike handle make this trimmer easy to customise to the respective user; a simple twist of the handle also makes it easy to transport or ready for compact storage.

Art. 127153

142 SB



Powerful, comfortable and service-friendly – this 1.7-kW brushcutter with a 40.7-cm³ displacement offers all this for both private and professional use. It comes standard with a powerful line spool head and brush blade and the anti-vibration technology ensures low-vibration handling for almost limitless possibilities.

Art. 127 230

130 H



This powerful, 1.2-kW brushcutter is one of the few trimmers that has a 4-stroke engine. This gives you the advantage of smooth running and less noise emissions, above all, as well as the fact that it can be operated using a regular fuel mixture. The special grip ergonomics also support a natural working posture.

Art. 127 232

142



This trimmer is worthy of the name. Because of its impressive torque, 1.9-kW, high-performance engine with a 40.7-cm³ displacement and the double-sided fan wheel for efficient cooling, this professional device not only delivers constant high performance, the low fuel consumption and large tank volume of 0.7 litres also enable long operating intervals.

Art. 127 227

137 SB



This versatile, powerful brushcutter with 1.5-kW and a 36.5-cm³ displacement is not just suitable for ambitious private users, but is also great for professional users for use in agriculture, gardening and landscaping applications because it's comfortable to carry, maintenance-friendly and economical.

Art. 127 229

154



This top model with 2.3-kW and a 54.2-cm³ displacement is specially designed for professional users and will delight due to its quality, operating comfort and maintenance-friendliness. Additional pluses of this trimmer are the optimised routing of the exhaust gas, the integrated anti-vibration system, the perfect weight balance and the maximum trim line diameter, which all enable you to work on large lawn areas.

Art. 127 228

Powerful brushcutters and trimmers

	116	118 L	118 B	107 L-S	120	130 H	137 SB	142 SB	142	154
Engine ccm / kW / hp	2-stroke 25.4 / 0.75 / 1.0	2-stroke 32.6 / 0.9 / 1.2	2-stroke 32.6 / 0.9 / 1.2	2-stroke 32.6 / 0.9 / 1.2	2-stroke 42.7 / 1.1 / 1.5	4-stroke 35.8 / 1.2 / 1.6	2-stroke 36.5 / 1.5 / 2.0	2-stroke 40.7 / 1.7 / 2.3	2-stroke 40.7 / 1.9 / 2.6	2-stroke 54.2 / 2.3 / 3.1
Cutting width Line head	41 cm	41 cm	41 cm	41 cm	41 cm	41 cm	41 cm	41 cm	-	-
Cutting width Blade	25 cm	25 cm	25 cm	25 cm	25 cm	25 cm	25 cm	25 cm	30 cm	30 cm
Hand grip	Loop grip	Loop grip	Bike handle	Loop grip	Bike handle	Bike handle	Bike handle	Bike handle	Bike handle	Bike handle
Shoulder strap Basic/semi-pro	- / -	- / -	• / -	- / -	- / •	- / •	- / •	- / •	- / •	- / •
Tank content	0.65 l	1.0 l	1.0 l	1.0 l	1.1 l	0.65 l	0.7 l	0.7 l	0.7 l	0.7 l
Start system	easy start	easy start	easy start	easy start	easy start	easy start	easy start	easy start	easy start	easy start
Anti-vibration	-	-	-	-	-	•	•	•	Pro version	Pro version
Weight approx.	5.6 kg	6.1 kg	7.2 kg	6.2 kg	8.0 kg	7.3 kg	7.7 kg	7.7 kg	8.3 kg	8.3 kg
Art. no.	127 150	127 151	127 152	127 231	127 153	127 232	127 229	127 230	127 227	127 228
EAN no.	400 371 805 1810	400 371 805 1827	400 371 805 1834	400 371 805 2633	400 371 805 1841	400 371 805 2640	400 371 805 2619	400 371 805 2626	400 371 805 2596	400 371 805 2602
Replacement line spool Art. no. / EAN no.	127 234 / 400 371 805 2664	127 234 / 400 371 805 2664	127 234 / 400 371 805 2664	127 234 / 400 371 805 2664	127 235 / 400 371 805 2671	127 235 / 400 371 805 2671	127 235 / 400 371 805 2671	127 235 / 400 371 805 2671	127 236 / 400 371 805 2688	127 236 / 400 371 805 2688
Replacement blade Art. no. / EAN no.	127 240 / 400 371 805 2725	127 240 / 400 371 805 2725	127 240 / 400 371 805 2725	127 240 / 400 371 805 2725	127 240 / 400 371 805 2725	127 240 / 400 371 805 2725	127 240 / 400 371 805 2725	127 240 / 400 371 805 2725	127 241 / 400 371 805 2732	127 241 / 400 371 805 2732


Additional technical information can be found on page 86/87 or at www.solobalko.com.

Please note: Depending on availability, pure SOLO or AL-KO products may also be delivered which are identical in construction, but only differ in look from the products shown.



Powerful accessories for powerful trimmers

	Art. no.	EAN	116	118 L	118 B	107 L	120	130 H	137 SB	142 SB	142	154
Replacement line spool M 12 x 1.5 I	127 233	400 371 805 2657									•	•
Replacement line spool M 10 x 1.25 I	127 234	400 371 805 2664	•	•	•	•						
Replacement line spool M 10 x 1.25 I	127 235	400 371 805 2671					•	•	•	•		
Replacement line spool M 12 x 1.5 I	127 236	400 371 805 2688									•	•
Replacement line spool M 12 x 1.5 I	127 237	400 371 805 2695									•	•
Replacement line spool M 10 x 1.25 I	127 238	400 371 805 2701							•	•	•	•
Grass blade 230 x 20, 4-tooth	127 239	400 371 805 2718	•	•	•	•	•	•	•	•	•	•
Thicket blade 230 x 20, 3-tooth	127 240	400 371 805 2725	•	•	•	•	•	•	•	•	•	•
Thicket blade 300 x 20, 3-tooth	127 241	400 371 805 2732									•	•
Circular saw blade 200-20 MZA	127 242	400 371 805 2749									•	•
Cutting line 2.0 x 15 MT	127 243	400 371 805 2756	•	•	•	•	•	•	•	•	•	•
Cutting line 2.4 x 15 MT	127 244	400 371 805 2763	•	•	•	•	•	•	•	•	•	•
Cutting line 3.0 x 15 MT	127 245	400 371 805 2770					•	•	•	•	•	•
Cutting line 2.4 x 90 MT	127 246	400 371 805 2787	•	•	•	•	•	•	•	•	•	•
Cutting line 2.5 x 26 MT	127 247	400 371 805 2794		•	•	•	•	•	•	•	•	•
Cutting line 3.5 x 26 MT	127 248	400 371 805 2800							•	•	•	•
Cutting line roll 2.5 x 53 MT	127 249	400 371 805 2817		•	•	•	•	•	•	•	•	•
Basic shoulder strap	127 250	400 371 805 2824	•	•	•	•	•	•	•	•	•	•
Semi-pro shoulder strap	127 251	400 371 805 2831			•	•	•	•	•	•	•	•
Pro shoulder strap	127 252	400 371 805 2848			•	•	•	•	•	•	•	•



Additional technical information can be found on page 86/87 or at www.solobyalko.com.
Please note: Depending on availability, pure SOLO or AL-KO products may also be delivered which are identical in construction, but only differ in look from the products shown.



Garden care
products for
the perfect
solo appearance



Manoeuvrability for the natural garden

5001 R-II



In high-grass meadows and ecological natural gardens, machines such as this scythe mower, which can cut meadow grass just as well as thick, matted weeds, are in particular demand. The moveable grass deflector and shorter distance between the wheel and the beam considerably improve grass depositing, while the enclosed drive system on the mower mechanism with its specially-hardened ESM blade and height-adjustable outsoles ensure a long service life.

Art. 127 300

532



The uncompromising, robust construction and the 117 cm wide scythe attachment with stable sliding shoes makes this high-grass mower for pros a sturdy companion for any type of terrain. This is because it will win you over with its extreme user comfort as well as its use of extremely durable components.

Art. 126 107

532-02

With rocker arm cutter bar for communal or commercial use

Art. 126 740



	5001-R II	532	532-02
Engine ccm / kW / rpm	B&S series 625 190 / 2.4 / 2,900	Honda GX 160 163 / 3.6 / 3,600	Honda GX 160 163 / 3.6 / 3,600
Cutting width	102 cm	117 cm	117 cm
Forward drive	•	• (2 x)	• (2 x)
Reverse drive	•	•	•
Blade drive can be connected	•	•	•
Tyre size (inches)	13" x 6.0-6	16" - 6.5 x 8	16" - 6.5 x 8
Electronic ignition	-	•	•
Weight approx.	60 kg	79 kg	79 kg
Art. no.	127 300	126 107	126 740
EAN no.	400 371 805 4163	401 596 653 2010	401 596 653 2027

Accessories




Rocker arm cutter bar
117 cm, for model 532
Art. 126736
EAN 401 596 659 1123



Cutter bar
117 cm, for model 532
Art. 126737
EAN 401 596 659 1116



SRS 850 snow plough
For model 5001-R II
Art. 113 267
EAN 400 371 805 3975

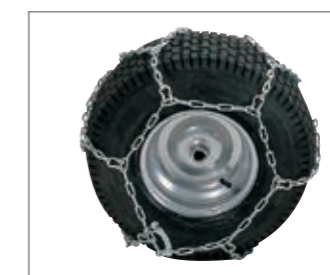

Snow chains
For model 5001-R II
Art. 112883
EAN 400 371 804 3907

Additional technical information can be found on page 86/87 or at www.solobyalko.com.

Please note: Depending on availability, pure SOLO or AL-KO products may also be delivered which are identical in construction, but only differ in look from the products shown.

One tool, many possibilities

The extra-powerful combo device with a scythe attachment and mower mechanism, tiller and ridge plough as well as sweeper is not just the perfect partner for lawn care, tilling and cleaning – thanks to the snow plough and chains, it is also well equipped for winter use. The best: depending on the demands and requirement, the 2.5-kW base device can also be combined with six different attachments.



Height-adjustable and pivoting handlebar

1 forward and 1 reverse gear

Wide pneumatic tyres for optimal traction

Powerful petrol engine

Worm gear unit

V-belt drive

Fitted with your choice of attachments

Combi BF 5002-R



Engine ccm / kW / rpm	B&S Series 675 190 / 2.5 / 3,200
Drive	1 forward gear / 1 reverse gear
Speed (FG / RG)	2.2 / 1.1 km/h
Transmission	Oil-bath worm gear, V-belt drive
Tyre size (inches)	13x5.00-6 pneumatic tyres
Handlebar	Height-adjustable 180°, pivoting
Art. no.	110 493
EAN no.	400 371 802 0021


Attachments



CB 870 scythe attachment
Working width 870 mm
Art. no. 110 494
EAN no. 400 371 802 0038



FSM 530 mower attachment
Working width 530 mm
Art. no. 110 739
EAN no. 400 371 802 4630

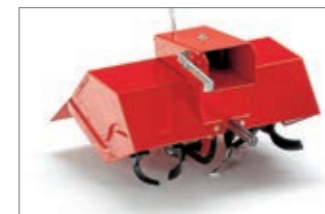

CF 500 tiller
Working width 500 mm
Art. no. 110 495
EAN no. 400 371 802 0045



Ridge plough
Art. no. 110 742
EAN no. 400 371 802 4661



KW 1050 sweeper
Working width 1050 mm
Art. no. 110 605
EAN no. 400 371 802 2896



SRS 850 snow plough
Working width 850 mm
Art. no. 113 267
EAN no. 400 371 805 3975



Snow chains
Art. no. 112 183
EAN no. 400 371 803 0570

Additional technical information can be found on page 86/87 or at www.solobyalko.com.
Please note: Depending on availability, pure SOLO or AL-KO products may also be delivered which are identical in construction, but only differ in look from the products shown.

Powerful suction, leaving nothing behind



750 B



Engine ccm / kW / rpm	B&S 500 E 140 / 2.0 / 3,000
Working width	75 cm
Air turbine housing	Steel plate
Suction height adjustment	Individual wheel, 4-stage
Grass catcher capacity	200 l
Weight	36.1 kg
Art. no.	127 141
EAN no.	400 371 805 1445

The powerful blower vac with a 75-cm working width and a powerful 2.0-kW Briggs & Stratton engine just doesn't stop – even wet or moist lawns and paths are no problem at all. It also comes with a practical suction hose with nozzle accessories to get into the smallest corners, removing leaves and dirt.

Suction hose (3 m) Art. no. / EAN no.	120 154 / 400 371 854 1731
--	-------------------------------

Additional technical information can be found on page 86/87 or at www.solobyalko.com.

Please note: Depending on availability, pure SOLO or AL-KO products may also be delivered which are identical in construction, but only differ in look from the products shown.



Big in making things small



TCS Duotec 2500

With the large main fill hopper for soft material and separate branch feed for branches to a max. diameter of 40 mm or 43 mm (TCS Duotec 3000) as well as the innovative blade system with slanted blades, the TCS Duotec shredder turns everything that comes into contact with the blades into kindling. An additional blade is mounted on the blade plate, and is used for pre-shredding the waste, guaranteeing the best results.

Art. 119 684

TCS Duotec 3000

With a 400-V connection for more power

Art. 119 685




	TCS Duotec 2500	TCS Duotec 3000
Output / Voltage	2,500 W / 230 V	2,900 W / 400 V
Zero-voltage switch	•	•
Fuse (slow)	16 amps B	16 amps B
Branches max. Ø	40 mm	43 mm
Height	135 cm	135 cm
Ball-bearing wheels	•	•
Weight approx.	51 kg	55 kg
Art. no.	119 684	119 685
EAN no.	400 371 835 3723	400 371 835 3730

Additional technical information can be found on page 86/87 or at www.solobyalko.com.

Please note: Depending on availability, pure SOLO or AL-KO products may also be delivered which are identical in construction, but only differ in look from the products shown.

Perfect teeth for a perfect cut

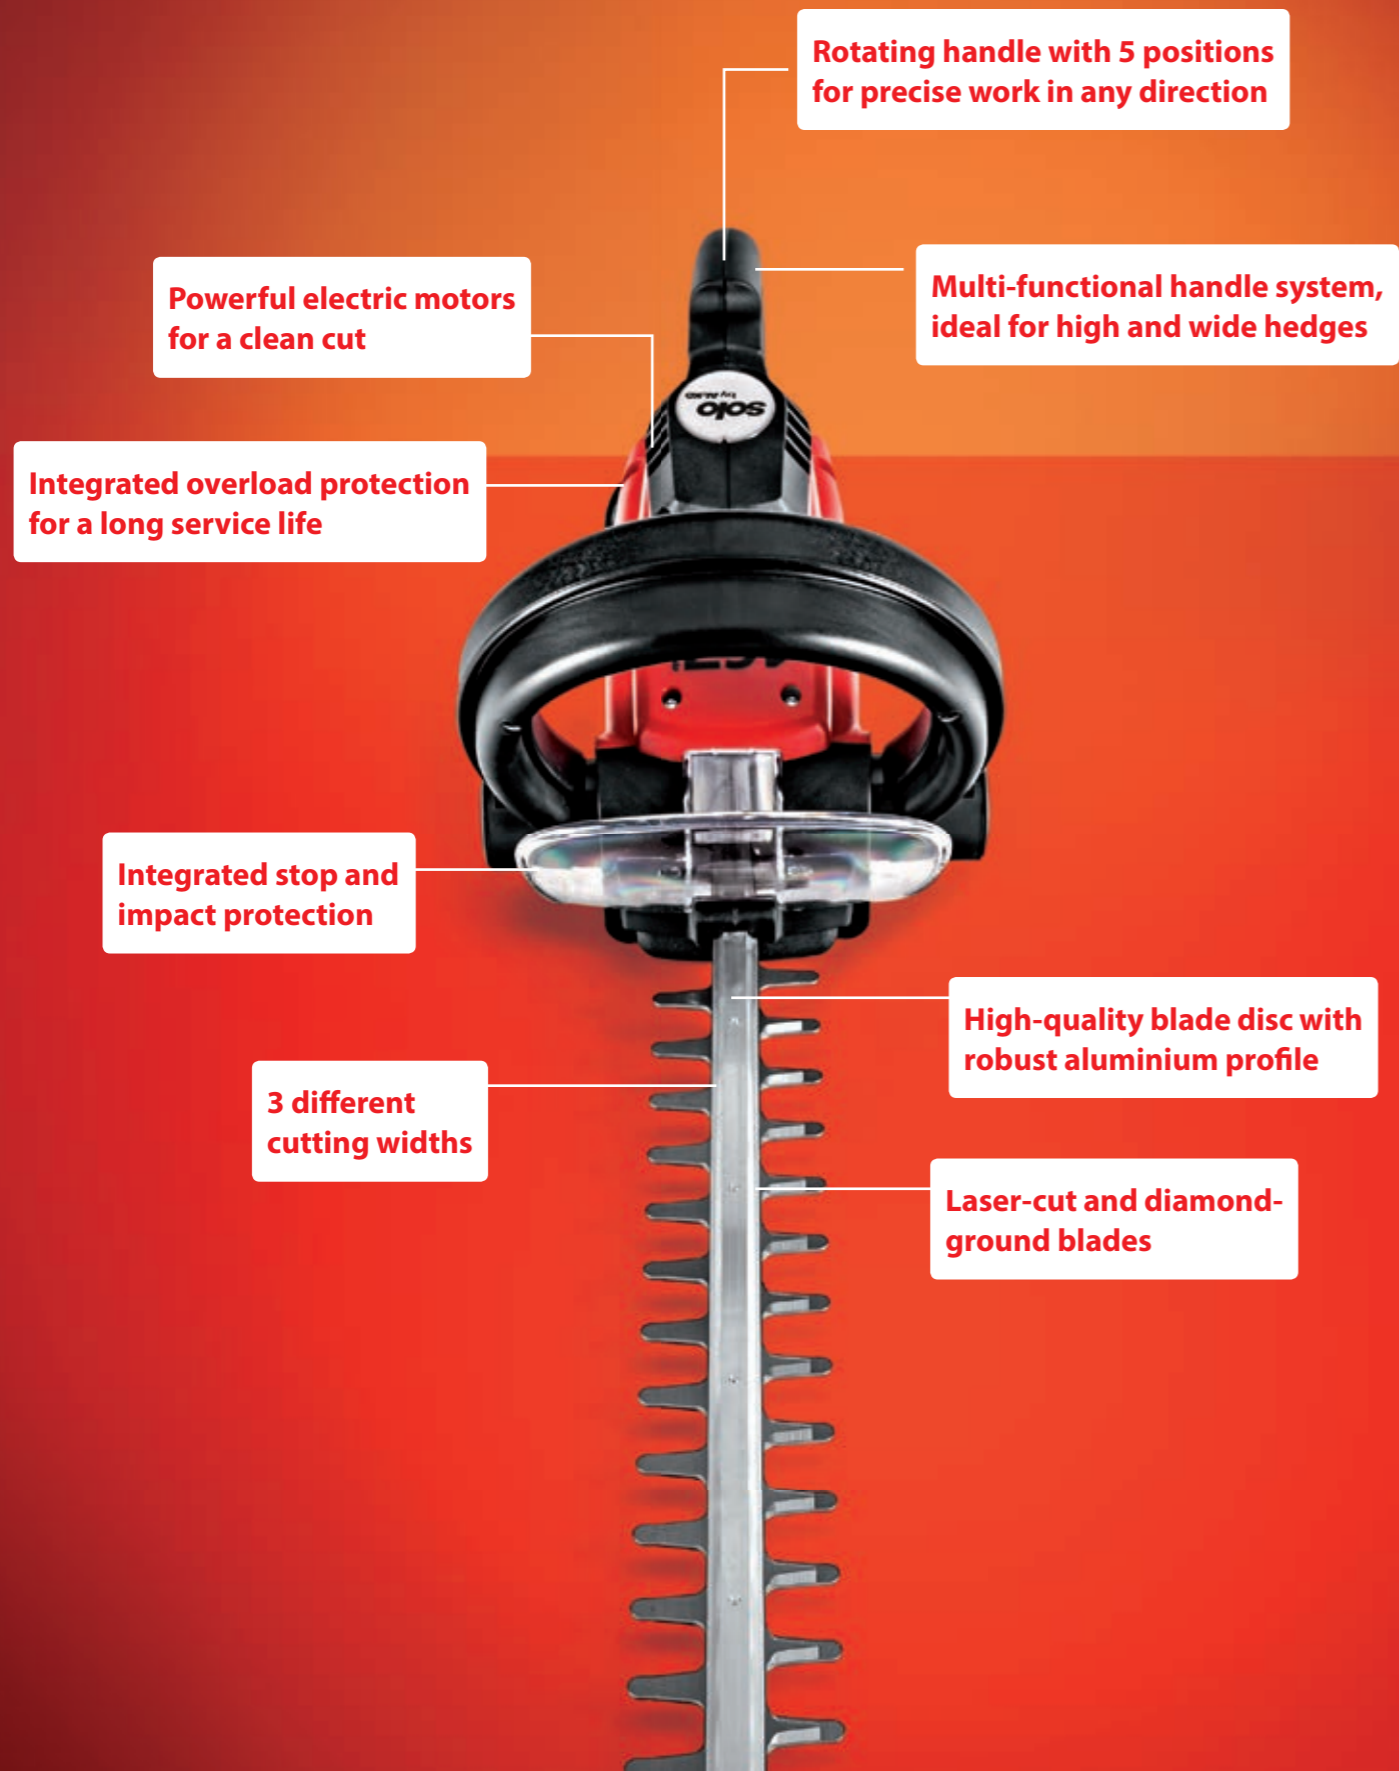

165

This light, electric hedge trimmer with a 45-cm cutting length enables long-term, fatigue-free work and ensures a clean cut due to its laser-cut blades and powerful motor. The Pleuel eccentric drive minimises vibrations and works together with the integrated overload protection to ensure maximum durability.

Art. 126 080



166

With 55-cm cutting width

Art. 126 081



167

With 65-cm cutting width

Art. 126 082

	165	166	167
Motor output	450 W	500 W	600 W
Blade length	450 mm	550 mm	650 mm
Max. blade opening / tooth gap	30 / 22 mm	30 / 22 mm	36 / 27 mm
Pleuel eccentric gear	•	•	•
Gear reduction 1-/2-stage	•/-	•/-	-/•
Cutting speed 1/min	3200	3200	2400
5-stage adjustable handle	•	•	•
Protective cover	•	•	•
Total length	91 cm	101 cm	111 cm
Weight	4.0 kg	4.1 kg	4.2 kg
Art. no.	126 080	126 081	126 082
EAN no.	401 596 616 5454	401 596 616 6550	401 596 616 7656

Additional technical information can be found on page 86/87 or at www.solobyalko.com.

Please note: Depending on availability, pure SOLO or AL-KO products may also be delivered which are identical in construction, but only differ in look from the products shown.




Chain saws
for the perfect
solo appearance



Cut your way through thick and thin

For beginners and professional users

From compact saws for household use to high-performance saws for professional use – the chain saw range from solo by AL-KO has it all. All saws have the same high, uncompromising quality, safety and user-friendly features. The powerful 2-stroke motors and blade sets appropriate for the respective model always ensure effective and clean cutting results.

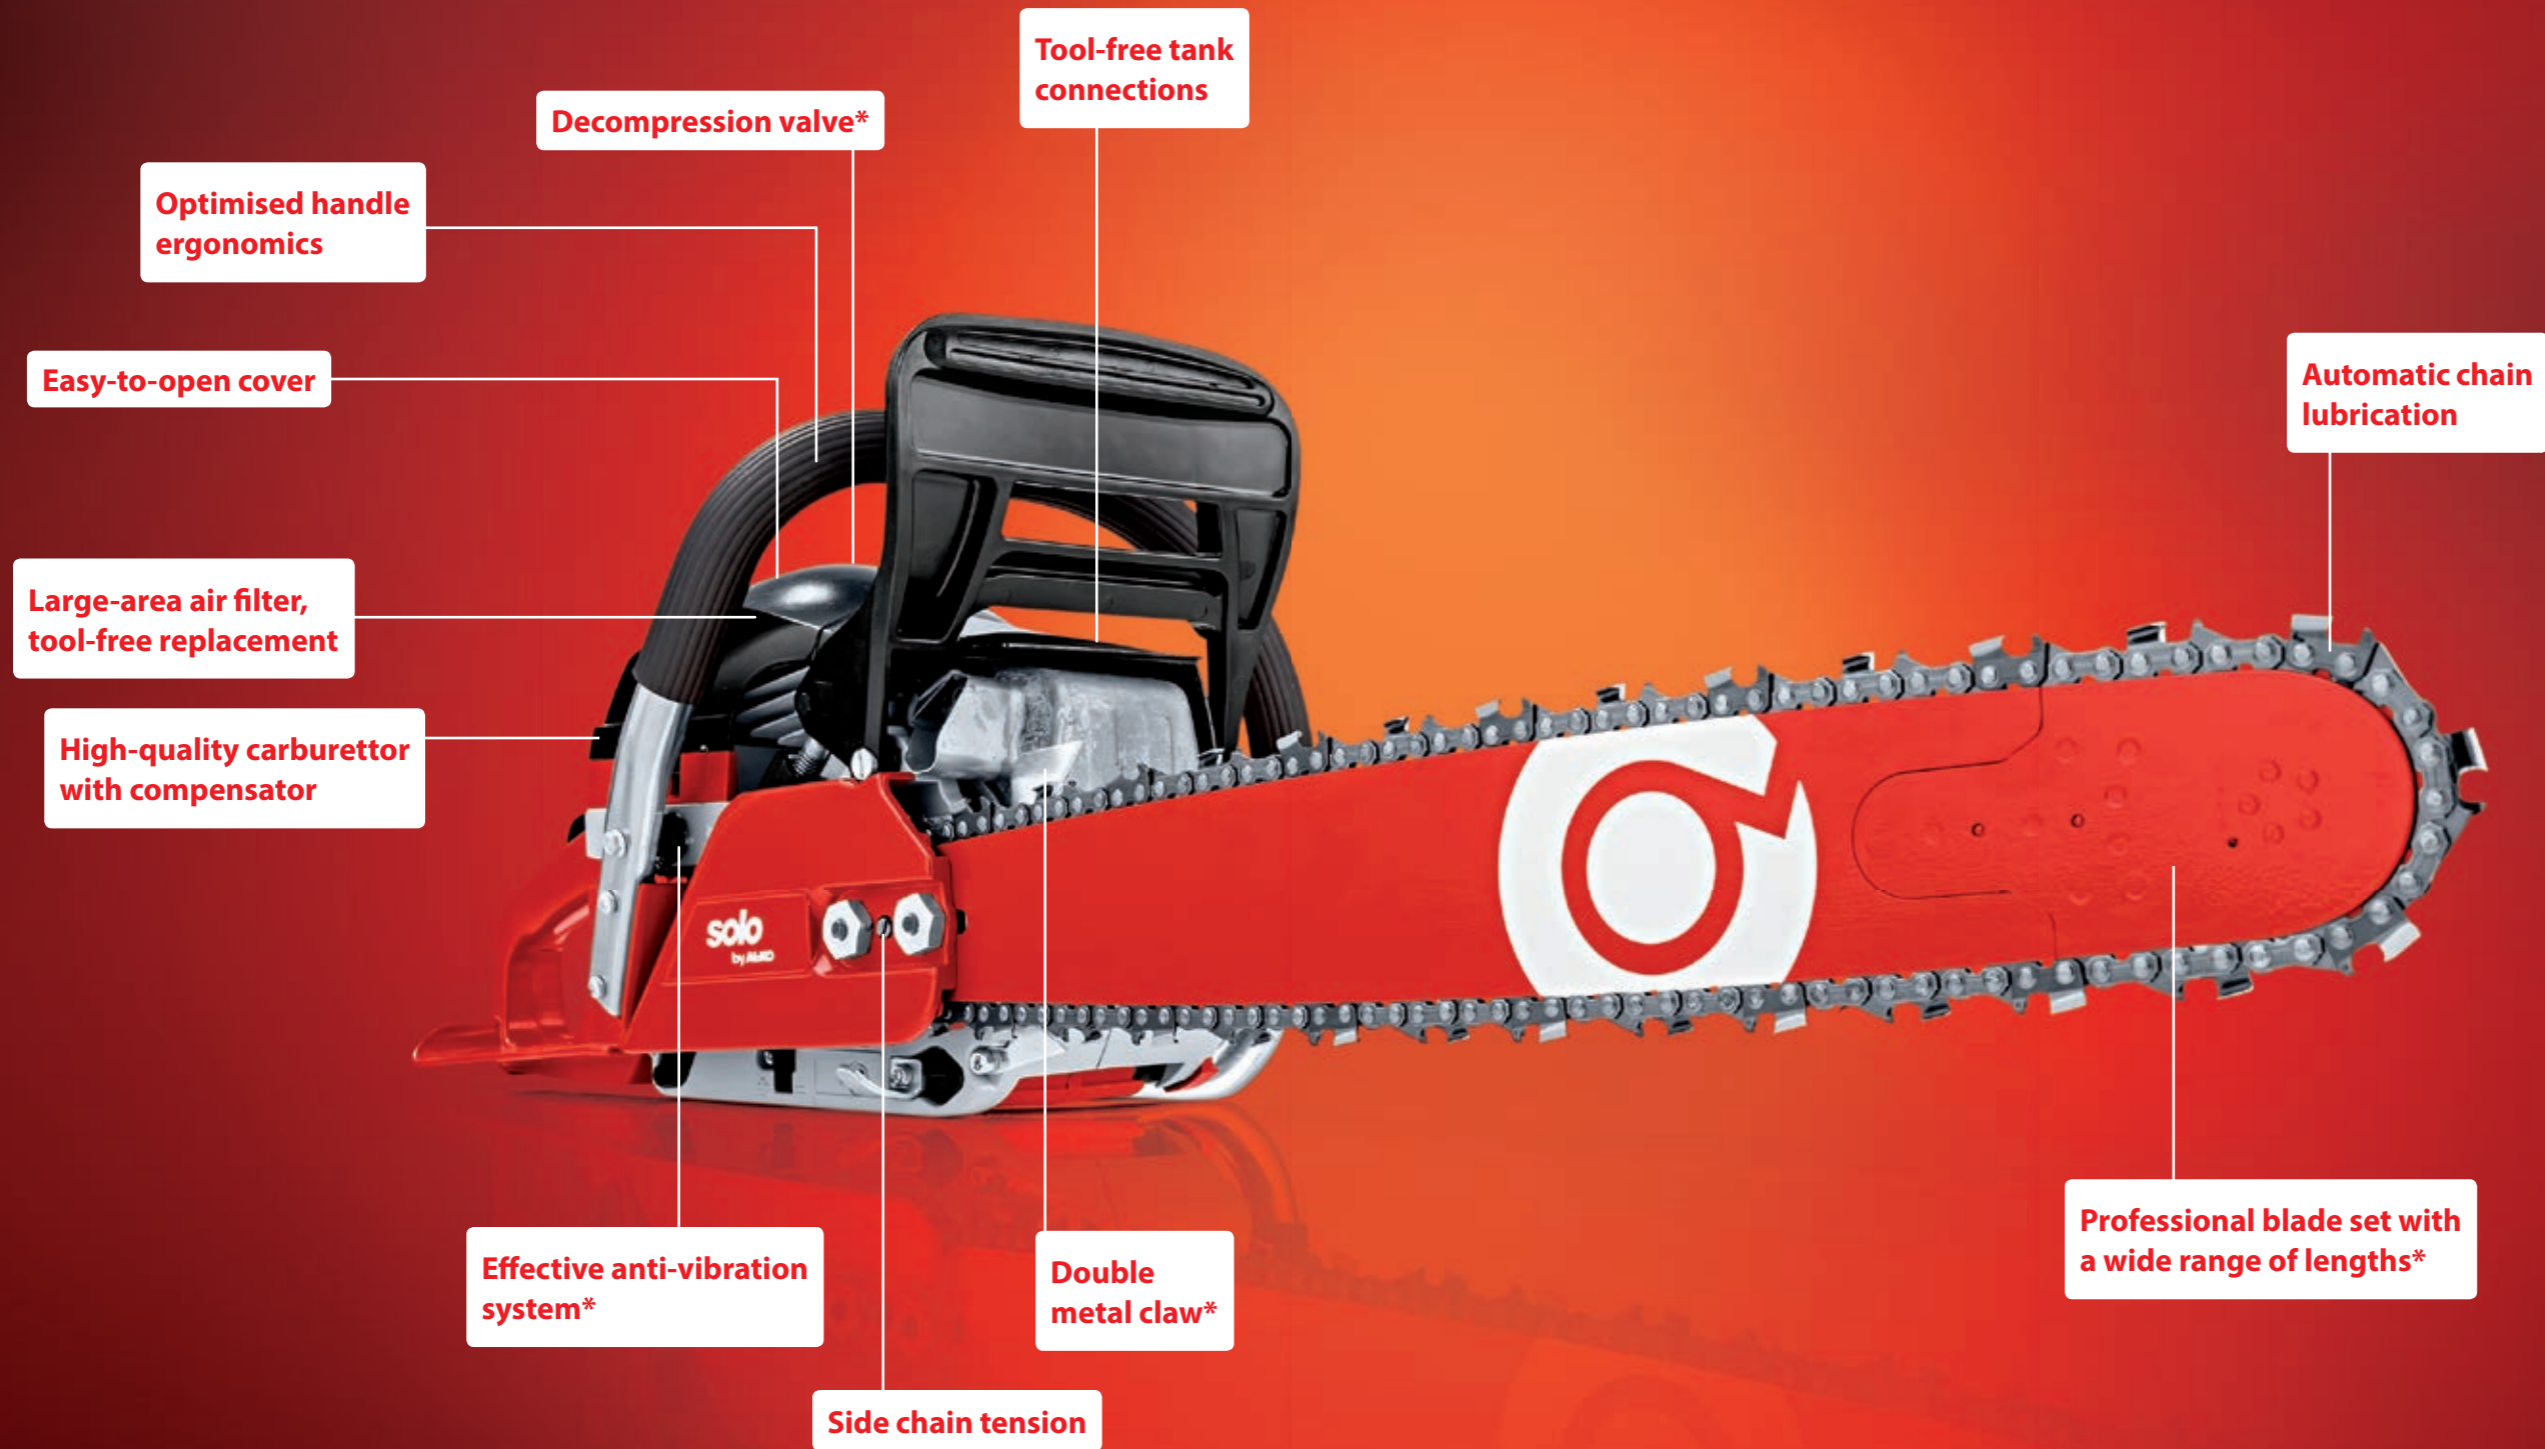

*not available for all models

Robust all-rounder that gets the job done

These powerful compact saws for demanding users don't just impress with their high-performance motor with a nickel-silicon-coated cylinder, the maintenance-free design as well as the chain and bar-lubrication system – they are also easy to operate and fit optimally in the hand.

Thanks to their ample power, the cutting of firewood, wooden constructions or the occasional small to medium-sized tree is no problem for these all-rounder saws. Their robust yet light design makes for light work under difficult conditions.



636



The powerful compact saw with 1.5 kW, a 36.3-cm³ displacement and a 35-cm bar length doesn't just impress with its handling and performance values – with the profile aluminium handle bar, the easy-start system, side chain tensioning as well as the automatic chain lubrication, it offers many other advantages for the ambitious private user.

Art. 127 161

643 IP



The powerful compact saw with a 38-cm blade and a chain with a .325 tooth gap is the perfect companion for all demanding work due to its integrated easy-start system, ergonomic profile aluminium handle bar, effective anti-vibration system as well as an output of 2.0 kW with a 40.2-cm³ displacement.

Art. 127 162

646



This multi-purpose saw is ideal for agricultural, landscaping and firewood gathering/preparation applications for private use with its 2.2-kW and 38-cm blade set. The optimised power-to-weight ratio and well-thought-out ergonomics enable maximum work efficiency with reduced physical exertion.

Art. 127 163

652

With the 2.4-kW motor and 38-cm blade set

Art. 127 164

Additional technical information can be found on page 86/87 or at www.solobyalko.com.
Please note: Depending on availability, pure SOLO or AL-KO products may also be delivered which are identical in construction, but only differ in look from the products shown.

Highest quality for professional use

The universal and professional saws offer the best prerequisites for the best results thanks to the highest quality, perfect power-to-weight ratios and optimal operating comfort – even in commercial use. The professional blade sets, improved air flow, side chain tensioning as well as high-quality

carburettor with compensator are just a few of the pluses of these devices – the same goes for the superior ergonomics, the rapid acceleration and the effective vibration dampening. The three-part, forged crankshaft also ensures maximum resistance to wear.

651 C



With astoundingly low weight, this powerful (2.6 kW) and robust universal saw for private and professional use is the benchmark for comfort and stability. The 38-cm blade set and .325 tooth gap ensure perfect results for any application; the large-sized handle and the easy-start system ensure pleasant handling.

Art. 127 165

656 C



This universal saw with 2.8 kW and especially high motor power is the go-to tool for all kinds of jobs in the forest. This is because due to its somewhat higher output compared to the 651 C, it's low power-to-weight ratio is 0.2 points better at 1.9 kg/kW. Thus along with the 38-cm bar with a .325 chain, many other blade sets are also available with a .325 or 3/8" tooth gap.

Art. 127 167

665



This professional saw is a high-performance machine for extreme loads. This is because it has the latest motor technology with 3.6 kW and a 65.9-cm³ displacement that proves its maximum capabilities under difficult circumstances and in hard wood. This is accompanied by a low power-to-weight ratio of 1.9 kg/kW. Along with the 40-cm blade set and 3/8" chain pitch, additional lengths are also available.

Art. 127 172

675



With its superior performance (4.3 kW) and comfortable equipment at a comparatively low weight, this professional saw with a 45-cm blade set and 3/8" chain pitch meets all the requirements for forestry work. As with all professional models, almost no vibrations can be felt thanks to the optimised handle ergonomics and multiple vibration dampening with large-sized springs.

Art. 127 175

681




Fast, powerful and extremely robust, this top model among the solo by AL-KO professional saws will win you over with 4.7 kW and an 80.7-cm³ displacement. It only has a power-to-weight ratio of 1.4 kg/kW, it is maintenance-friendly, and the three-part forged crankshaft and 50-cm blade set with a 3/8" chain also know how to impress. Cutting lengths of 45 to 70 cm are also available.

Art. 127 179

Petrol chain saws from small to large

	636	643 IP	646	652	651 C	656 C	665	675	681
Displacement	36.3 cm ³	40.2 cm ³	45.1 cm ³	51.8 cm ³	50.9 cm ³	55.5 cm ³	65.9 cm ³	74.6 cm ³	80.7 cm ³
Power	1.5 kW / 2.0 hp	2.0 kW / 2.7 hp	2.2 kW / 3.0 hp	2.4 kW / 3.3 hp	2.6 kW / 3.5 hp	2.8 kW / 3.8 hp	3.6 kW / 4.9 hp	4.3 kW / 5.85 hp	4.7 kW / 6.4 hp
Power-to-weight ratio	2.8 kg/kW	2.0 kg/kW	2.1 kg/kW	1.9 kg/kW	2.1 kg/kW	1.9 kg/kW	1.9 kg/kW	1.5 kg/kW	1.4 kg/kW
Weight	4.2 kg	4.1 kg	4.7 kg	4.7 kg	5.4 kg	5.4 kg	6.7 kg	6.7 kg	6.6 kg
Bar length	35 cm / 14"	38 cm / 15"	38 cm / 15"	38 cm / 15"	38 cm / 15"	38 cm / 15"	40 cm / 16"	45 cm / 18"	50 cm / 20"
Chain pitch	3/8" spec.	.325	.325	.325	.325	.325	3/8"	3/8"	3/8"
Side Chain tension	•	•	•	•	•	•	•	•	•
Anti-vibration	•	•	•	•	•	•	•	•	•
Oil volume control	-	-	•	•	•	•	•	•	•
Air pre-heating in winter operation	-	-	-	-	•	•	•	•	•
Tool-free air filter replacement	-	-	•	•	•	•	•	•	•
Tool-free tank connections	•	•	•	•	•	•	•	•	•
Decompression valve	-	-	•	•	•	•	•	•	•
Easy start system	•	•	•	•	•	•	•	•	•
Primer	•	•	•	•	•	•	•	•	•
Art. no.	127 161	127 162	127 163	127 164	127 165	127 167	127 172	127 175	127 179
EAN no.	400 371 805 1933	400 371 805 1940	400 371 805 1957	400 371 805 1964	400 371 805 1971	400 371 805 1995	400 371 805 2046	400 371 805 2077	400 371 805 2114

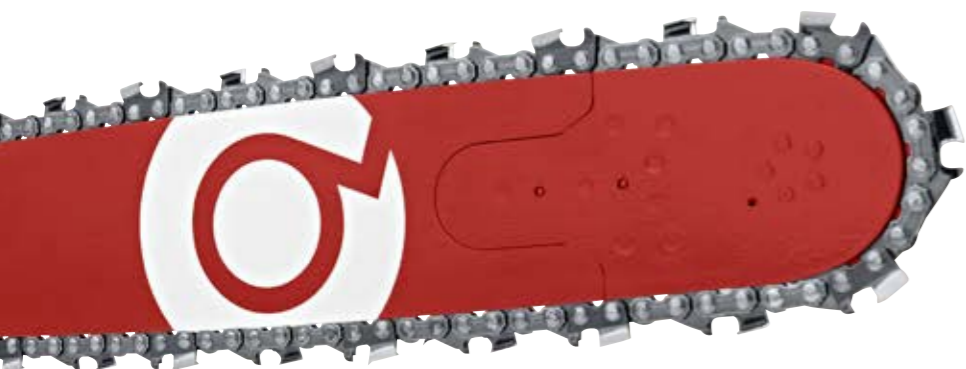

Alternative blade sets	651 C	656 C	665	675	681
Cutting length / Pitch	45 cm / 18" .325	45 cm / 18" .325	45 cm / 18" 3/8"	50 cm / 20" 3/8"	45 cm / 18" 3/8"
Art. no. / EAN no.	127 166/400 371 805 1988	127 168/400 371 805 2008	127 173/400 371 805 2053	127 176/400 371 805 2084	127 178/400 371 805 2107
Cutting length / Pitch		40 cm / 16" 3/8"	50 cm / 20" 3/8"	60 cm / 24" 3/8"	60 cm / 24" 3/8"
Art. no. / EAN no.		127 169/400 371 805 2015	127 174/400 371 805 2060	127 177/400 371 805 2091	127 180/400 371 805 2121
Cutting length / Pitch			45 cm / 18" 3/8"		70 cm / 28" 3/8"
Art. no. / EAN no.			127 170/400 371 805 2022		127 181/400 371 805 2138
Cutting length / Pitch			50 cm / 20" 3/8"		
Art. no. / EAN no.			127 171/400 371 805 2039		

Additional technical information can be found on page 86/87 or at www.solobyalko.com. Please note: Depending on availability, pure SOLO or AL-KO products may also be delivered which are identical in construction, but only differ in look from the products shown.

The whisper-quiet saw for inside and out

621



This powerful and quiet electric chain saw is ideal for working in closed rooms or areas around the house, e.g. on construction sites or for gathering firewood. The 2.5-kW motor provides ample power, the tool-free adjustment and tensioning of the 40-cm blade set with a 3/8" spec. chain provide maximum operating comfort.

Art. 127 253

Power	2.5 kW
Weight	4.3 kg
Bar length	40 cm / 16"
Chain pitch	3/8" spec.
Tool-free chain tensioning	•
Transparent chain oil tank	•
Tool-free tank connections	•
Cable strain relief	•
Art. no.	127 253
EAN no.	400 371 805 3425

Additional technical information can be found on page 86/87 or at www.solobyalko.com.

Please note: Depending on availability, pure SOLO or AL-KO products may also be delivered which are identical in construction, but only differ in look from the products shown.



Chain saw accessories

Accessories



Round chain file Ø 5.5 mm
Art. 126 179
EAN 401 596 680 1093

Round chain file Ø 4.8 mm
Art. 126178
EAN 401 596 680 2878

Round chain file Ø 4.5 mm
Art. 126177
EAN 401 596 680 4315

Round chain file Ø 4 mm
Art. 126 176
EAN 401 596 680 3585



File handle
Art. 126 090
EAN 401 596 680 1086



Grease gun for saw bar
Art. 126167
EAN 401 596 680 4308



File holder + file 4.0 mm
Art. 126 637
EAN 401 596 680 4476

File holder + file 4.5 mm
Art. 126 638
EAN 401 596 680 4483

File holder + file 4.8 mm
Art. 126 639
EAN 401 596 680 4490

File holder + file 5.5 mm
Art. 126 640
EAN 401 596 680 4506



Manual filing tool
Art. 126173
EAN 401 596 660 2003



"Jolly" electric chain sharpener
Art. 126 172
EAN 401 596 660 2065



Rivet removal device
Art. 126 174
EAN 401 596 660 2072



Rivet insertion device
Art. 126 175
EAN 401 596 660 2089



Sawing trestle
Metal, without saw
Art. 126 641
EAN 401 596 669 2004



Chain guard
58 x 14 cm, universal
Art. 127 199
EAN 400 371 805 2312

Individual components and operating supplies

Base devices (motor unit only)

Type	Power	Art. no.	EAN
646	2.2 kW / 3.0 hp	127 182	400 371 805 2145
652	2.4 kW / 3.3 hp	127 183	400 371 805 2152
651 C	2.6 kW / 3.5 hp	127 184	400 371 805 2169
656 C	2.8 kW / 3.8 hp	127 185	400 371 805 2176
665	3.6 kW / 4.9 hp	127 186	400 371 805 2183
675	4.3 kW / 5.85 hp	127 187	400 371 805 2190
681	4.7 kW / 6.4 hp	127 188	400 371 805 2206

Operating supplies

Description	Quantity	Art. no.	EAN
Pro 2-stroke motor oil	100 ml	126 616	401 596 683 1038
Pro 2-stroke motor oil	1.0 l	126 617	401 596 683 1045
Pro 2-stroke motor oil	1.0 l Dosage bottle	126 618	401 596 683 1052
Chain oil	1.0 l	126 630	401 596 683 1892
Chain oil	5.0 l	126 626	401 596 683 1854
Chain oil	20 l	126 627	401 596 683 1861
Chain oil	60 l	126 628	401 596 683 1878
Chain oil	200 l	126 629	401 596 683 1885
Bio chain oil	1.0 l	126 619	401 596 683 1076
Bio chain oil	5.0 l	126 620	401 596 683 1083
Bio chain oil	20 l	126 621	401 596 683 1090
Bio chain oil	55 l	126 634	401 596 683 1120
Bio chain oil	200 l	126 633	401 596 683 1144
Universal cleaner	500 ml	126 623	401 596 683 1168
Universal cleaner	10 l	126 624	401 596 683 1175
Universal spray	300 ml	126 625	401 596 683 1632
High-performance gear grease	100 ml	126 632	401 596 683 1809

Chain saws chains and bars

Type	Blade length	Pitch	Drive links	Shape	Type	Art. no.	EAN	Bar end	Art. no.	EAN
621	40 cm / 16"	3/8" spec.	57 E/.050"/1.3 mm	HM	91 PX	126 647	401 596 669 4497	A041	126 201	401 596 669 6859
636	30 cm / 12"	3/8" spec.	45 E/.050"/1.3 mm	HM	91 VG	127 200	400 371 805 2329	A095	127 189	400 371 805 2213
	35 cm / 14"	3/8" spec.	52 E/.050"/1.3 mm	HM	91 PG	127 201	400 371 805 2336	A095	127 190	400 371 805 2220
643 IP	33 cm / 13"	.325	56 E/.058"/1.5 mm	HM	21 BP	127 202	400 371 805 2343	K095	127 191	400 371 805 2237
	38 cm / 15"	.325	64 E/.058"/1.5 mm	HM	21 BP	127 203	400 371 805 2350	K095	127 192	400 371 805 2244
646	33 cm / 13"	.325	56 E/.058"/1.5 mm	HM	21 BP	127 202	400 371 805 2343	K095	127 191	400 371 805 2237
	38 cm / 15"	.325	64 E/.058"/1.5 mm	HM	21 BP	127 203	400 371 805 2350	K095	127 192	400 371 805 2244
652	45 cm / 18"	.325	72 E/.058"/1.5 mm	HM	21 BP	127 204	400 371 805 2367	K095	127 193	400 371 805 2251
	33 cm / 13"	.325	56 E/.058"/1.5 mm	HM	21 BP	127 202	400 371 805 2343	K095	127 191	400 371 805 2237
	38 cm / 15"	.325	64 E/.058"/1.5 mm	HM	21 BP	127 203	400 371 805 2350	K095	127 192	400 371 805 2244
651 C	45 cm / 18"	.325	72 E/.058"/1.5 mm	HM	21 BP	127 204	400 371 805 2367	K095	127 193	400 371 805 2251
	33 cm / 13"	.325	56 E/.058"/1.5 mm	HM	21 BP	127 202	400 371 805 2343	K095	127 191	400 371 805 2237
	38 cm / 15"	.325	64 E/.058"/1.5 mm	HM	21 BP	127 203	400 371 805 2350	K095	127 192	400 371 805 2244
651 C	45 cm / 18"	.325	72 E/.058"/1.5 mm	HM	21 BP	127 204	400 371 805 2367	K095	127 193	400 371 805 2251
	33 cm / 13"	.325	56 E/.058"/1.5 mm	HM	21 LP	127 210	400 371 805 2428	K095	127 213	400 371 805 2459
	38 cm / 15"	.325	64 E/.058"/1.5 mm	VM	21 LP	127 211	400 371 805 2435	K095	127 214	400 371 805 2466
651 C	45 cm / 18"	.325	72 E/.058"/1.5 mm	VM	21 LP	127 212	400 371 805 2442	K095	127 215	400 371 805 2473
	33 cm / 13"	.325	56 E/.058"/1.5 mm	HM	21 BP	127 202	400 371 805 2343	K095	127 191	400 371 805 2237
	38 cm / 15"	.325	64 E/.058"/1.5 mm	HM	21 BP	127 203	400 371 805 2350	K095	127 192	400 371 805 2244
656 C	45 cm / 18"	.325	72 E/.058"/1.5 mm	HM	21 BP	127 204	400 371 805 2367	K095	127 193	400 371 805 2251
	33 cm / 13"	.325	56 E/.058"/1.5 mm	VM	21 LP	127 210	400 371 805 2428	K095	127 213	400 371 805 2459
	38 cm / 15"	.325	64 E/.058"/1.5 mm	VM	21 LP	127 211	400 371 805 2435	K095	127 214	400 371 805 2466
656 C	45 cm / 18"	.325	72 E/.058"/1.5 mm	VM	21 LP	127 212	400 371 805 2442	K095	127 215	400 371 805 2473
	40 cm / 16"	3/8"	60 E/.058"/1.5 mm	VM	73 LP	127 205	400 371 805 2374	K095	127 194	400 371 805 2268
	45 cm / 18"	3/8"	68 E/.058"/1.5 mm	VM	73 LP	127 206	400 371 805 2381	K095	127 221	400 371 805 2534
665	50 cm / 20"	3/8"	72 E/.058"/1.5 mm	VM	73 LP	127 207	400 371 805 2398	K095	127 196	400 371 805 2282
	40 cm / 16"	3/8"	60 E/.058"/1.5 mm	VM	73 LP	127 205	400 371 805 2374	D009	127 216	400 371 805 2480
	45 cm / 18"	3/8"	68 E/.058"/1.5 mm	VM	73 LP	127 206	400 371 805 2381	D009	127 195	400 371 805 2275
665	50 cm / 20"	3/8"	72 E/.058"/1.5 mm	VM	73 LP	127 207	400 371 805 2398	D009	127 217	400 371 805 2497
	60 cm / 24"	3/8"	84 E/.058"/1.5 mm	VM	73 LP	127 208	400 371 805 2404	D009	127 197	400 371 805 2299
	70 cm / 28"	3/8"	92 E/.058"/1.5 mm	VM	73 LP	127 209	400 371 805 2411	D009	127 198	400 371 805 2305
675	40 cm / 16"	3/8"	60 E/.058"/1.5 mm	VM	73 LP	127 205	400 371 805 2374	D009	127 216	400 371 805 2480
	45 cm / 18"	3/8"	68 E/.058"/1.5 mm	VM	73 LP	127 206	400 371 805 2381	D009	127 195	400 371 805 2275
	50 cm / 20"	3/8"	72 E/.058"/1.5 mm	VM	73 LP	127 207	400 371 805 2398	D009	127 217	400 371 805 2497
675	60 cm / 24"	3/8"	84 E/.058"/1.5 mm	VM	73 LP	127 208	400 371 805 2404	D009	127 197	400 371 805 2299
	70 cm / 28"	3/8"	92 E/.058"/1.5 mm	VM	73 LP	127 209	400 371 805 2411	D009	127 198	400 371 805 2305
	40 cm / 16"	3/8"	60 E/.058"/1.5 mm	VM	73 LP	127 205	400 371 805 2374	D009	127 216	400 371 805 2480
681	45 cm / 18"	3/8"	68 E/.058"/1.5 mm	VM	73 LP	127 206	400 371 805 2381	D009	127 195	400 371 805 2275
	50 cm / 20"	3/8"	72 E/.058"/1.5 mm	VM	73 LP	127 207	400 371 805 2398	D009	127 217	400 371 805 2497
	60 cm / 24"	3/8"	84 E/.058"/1.5 mm	VM	73 LP	127 208	400 371 805 2404	D009	127 197	400 371 805 2299
681	70 cm / 28"	3/8"	92 E/.058"/1.5 mm	VM	73 LP	127 209	400 371 805 2411	D009	127 198	400 371 805 2305

Stylish outfits for work and play

Cut protection trousers



Size	Art. no.	EAN code
S	127 260	400 371 805 3449
M	127 261	400 371 805 3456
L	127 262	400 371 805 3463
XL	127 263	400 371 805 3470
XXL	127 264	400 371 805 3487
3XL	127 265	400 371 805 3494

High-tech cut protection on the inside and numerous practical pocket solutions on the outside, e.g. for combination wrenches, make these trousers made from a sturdy, water-repellent softshell material a must for any sawing work. Thanks to the integrated kidney protection and a band made out of rubber, these trousers are extremely comfortable.

Forest work jacket



Size	Art. no.	EAN code
S	127 266	400 371 805 3500
M	127 267	400 371 805 3517
L	127 268	400 371 805 3524
XL	127 269	400 371 805 3531
XXL	127 270	400 371 805 3548



This comfortable, KWF-tested work jacket doesn't just guarantee increased safety in the forest due to the extensive use of signal colours, it also ensures the perfect fit for all wearers due to the adjustable arm and collar elements. The jacket mesh and air inlets ensure improved climate comfort, the large breast and outside pockets ensure enough storage space.

Cut protection boots



Size	Art. no.	EAN code
39	127 287	400 371 805 3715
40	127 288	400 371 805 3722
41	127 289	400 371 805 3739
42	127 290	400 371 805 3746
43	127 291	400 371 805 3753
44	127 292	400 371 805 3760
45	127 293	400 371 805 3777
46	127 294	400 371 805 3784
47	127 295	400 371 805 3791
48	127 296	400 371 805 3807

With protection class 2 (S3 HRO SRC), these shoes not only provide increased protection compared to standard-cut protection boots, their comfort foot support, breathable lining and water-repellent special leather also ensure optimal traction and wearing comfort. The sturdy rubber caps and sewn soles protect the shoe against wear and scratches.

Forest protective helmet / Forest protective helmet Pro



Art. no.	EAN code
127 285	400 371 805 3692

Protective helmet Pro, signal yellow

Art. no.	EAN code
127 286	400 371 805 3708

This robust, plastic helmet from 3M/Peltor combines high-quality and extra-lightweight into head protection, and, thanks to the ratchet system, it can also be adjusted to the wearer quickly and easily just like the height-adjustable hearing protection. It comes with an overlapping metal visor to ensure optimal protection from above, even from dirt.

Protective gloves



Art. no.	EAN code
127 284	400 371 805 3685

The interior made from hard-wearing, cow grain leather, reinforced thumb and index finger elements as well as an exterior made up of signal colours and reflective material ensure a high degree of comfort and safety. The integrated elastic cord and cuff prevent undesired penetration of dust and dirt.

2-in-1 softshell jacket



Size	Art. no.	EAN code
S	127 272	400 371 805 3562
M	127 273	400 371 805 3579
L	127 274	400 371 805 3586
XL	127 275	400 371 805 3593
XXL	127 276	400 371 805 3609
3XL	127 277	400 371 805 3616



This 3-layer-laminate, softshell jacket is wind- and water-proof as well as highly breathable. Its robust and abrasion-proof material is not only extremely durable, but the inside makes it extremely comfortable to wear thanks to the fleece material. The jacket also offers numerous pockets and adjustment options, i.e. remove the arms to turn the jacket into a practical waistcoat.

Fleece jacket



Size	Art. no.	EAN code
S	127 278	400 371 805 3623
M	127 279	400 371 805 3630
L	127 280	400 371 805 3647
XL	127 281	400 371 805 3654
XXL	127 282	400 371 805 3661
3XL	127 283	400 371 805 3678

Light, breathable and warm fleece jacket with a front zip fastener and reinforced elements in proven Helly Hansen quality (270 g/m²), which is well suited for both work and play. The cut of the draw cord on the seam as well as the long sleeves with thumb hole offer the best fit while the reflective strip offers additional protection.

Technical data

Description	Art. no.	Page	Sound pressure level	Sound pressure level	Sound pressure level	Uncertainty factor	Vibration value	Uncertainty factor
			measured LpA [dB(A)]	measured LwA [dB(A)]	guaranteed LwA [dB(A)]	sound pressure level K _{pk} [dB(A)]	guaranteed ahw (m/s ²)	K (m/s ²)
RIDE-ON MOWERS								
555 H	126606	18 / 20	89	98	99	2	7	2
566 H	126608	18 / 20	90	99	100	2	2/4	2
T 13-92.5 HD	127155	18 / 20	90	99	100	2	2/4	2
T 15-95.5 HD-A	127133	16 / 20	90	99	100	2	2/4	2
T 18-95.5 HD	127134	16 / 21	90	99	100	2	2/4	2
T 16-95.5 HD V2	127135	16 / 21	90	99	100	2	2/4	2
T 16-105.5 HD V2	127136	17 / 21	90	99	100	2	2/4	2
T 20-105.5 HDE V2	127137	17 / 21	90	99	100	2	2/4	2
T 23-125.5 HD V2	127138	17 / 21	94	104	105	2	2/4	2
ELECTRIC LAWNMOWERS								
4705 E	113104	45	85	94	95	2	6	2
PETROL LAWNMOWERS								
4255 P-A	127118	36 / 40	86	95	96	2	6	2
4735 SP-A	127116	36 / 40	86	95	96	2	6	2
4755 VSI	127120	37 / 40	86	95	96	2	6	2
4755 VS	127122	37 / 40	86	95	96	2	6	2
4605 SP Bio	127128	37 / 41	86	95	96	2	6	2
5235 SP-A	127117	38 / 41	88	96	98	2	6	2
5255 VS	127121	38 / 41	88	96	98	2	6	2
5255 VS-H	127123	38 / 41	88	96	98	2	6	2
5275 VS	127124	38 / 44	88	96	98	2	6	2
582	127129	43 / 44	81.5	94	95	1.8	12	2
546	127130	43 / 44	85.0	95	96	2.5	12	2
546 R	127131	43 / 44	85.0	95	96	2.5	12	2
546 RS	127132	43 / 44	85.0	95	96	2.5	12	2
4855 SP ALU	127125	31 / 32	86	95	96	2	6	2
5375 VS ALU	127126	31 / 32	88	96	98	2	6	2
5375 VSC ALU	127127	31 / 32	88	96	98	2	6	2
553 K	127148	30 / 32	88	96	98	2	6	2
AUTOMATIC LAWNMOWERS								
Robolinho® 1000	119509	26 / 27	-	63	65			
Robolinho® 3000	119356	26 / 27	-	65	69			
Robolinho® 4000	119511	26 / 27	-	65	69			
BLOWER VACS								

Description	Art. no.	Page	Sound pressure level	Sound pressure level	Sound pressure level	Uncertainty factor	Vibration value	Uncertainty factor
			measured LpA [dB(A)]	measured LwA [dB(A)]	guaranteed LwA [dB(A)]	sound pressure level K _{pk} [dB(A)]	guaranteed ahw (m/s ²)	K (m/s ²)
750 B	127141	65	86		98	2	6	2
BRUSHCUTTERS								
107 L-S	127231	51 / 54	104	111	116	5	9	1.5
116	127150	50 / 54	91	107	110	3	7	1.5
118 L	127151	50 / 54	104	111	116	5	9	1.5
118 B	127152	50 / 54	104	111	116	5	9	1.5
120	127153	52 / 55	94	111	113	2	9	1.5
130 H	127232	52 / 55	95	103	107	2.5	4.3	2.5
137 SB	127229	52 / 55	97	108	110	2.5	6.6	2.5
142 SB	127230	53 / 55	97	108	110	2.5	6.6	2.5
142	127227	53 / 55	92	105	112	2.5	4.9	1.5
154	127228	53 / 55	92	103	112	2.5	4.9	1.5
ELECTRIC & PETROL CHAIN SAWS								
621	126531	80	90	103.9	106	2.5	5.0	1.5
636	127161	75 / 78	100	105	109	3.0	7.5	2.5
643 IP	127162	75 / 78	101	108	110	3.0	7.5	2.5
646	127182	75 / 78	102	113	117	3.0	4.9	2.5
652	127183	75 / 78	102	113	117	3.0	5.7	2.5
651 C	127184	76 / 79	103	114	117	2.5	4.9	2.5
656 C	127185	76 / 79	104	114	117	2.5	4.9	2.5
665	127186	77 / 79	102	111	117	5.0	5.0	2.5
675	127187	77 / 79	102	112	117	4.0	5.9	2.5
681	127188	77 / 79	104	114	117	3.0	5.9	2.5
HEDGE TRIMMERS								
165	126080	69	2.5	85	98	-	< 2.5	0.5
166	126081	69	2.5	85	98	-	< 2.5	0.5
167	126082	69	2.5	84	98	-	< 2.5	0.5
SCYTHE MOWERS								
5001 R-II	127300	60 / 61	90	102	104	2	25.99	10.4
532	126107	60 / 61	99	104	109	5	24.61	9.7
532-02	126740	60 / 61	99	104	109	5	24.61	9.7
COMBO DEVICES								
Combi BF 5002-R	110493	63	80	92	93	2	5.5	0.7
SHREDDERS								
TCS Duotec 2500	119684	67	102	113	115	2	-	-
TCS Duotec 3000	119685	67	102	113	115	2	-	-

AL-KO GERÄTE GMBH

Ichenhauser Str. 14
89359 Kötz
Germany
Tel. +49 8221 203-0
garten.hobby@al-ko.de
www.al-ko.com/garten

AL-KO Kober Ges.mbh

Werk Obdach, Hauptstr. 51
8742 Obdach / Stmk.
Austria
Tel. +43 35 78 25 15-0
office.obdach@al-ko.at
www.al-ko.com/garden

AL-KO Ginge A/S

Godsbanegade 20
9700 Brønderslev
Denmark
Tel. +45 98 82 10 00
export@ginge.com
www.al-ko.com/garden

AL-KO INTERNATIONAL PTY. LTD.

67-91 Nathan Road
Dandenong South VIC 3175
Australia
Tel. +61 3 9767 3700
hallam@alko.com.au
www.al-ko.com/garden

Visit us online:
www.solobyalko.com

Provided by your solo by AL-KO partner:

Subject to modifications in response to technical developments. No liability accepted for mistakes and printing errors. Order no. 2300468/12-2014